


NUMATICS®

Tiny Titan Series

Small Bore, Square End Cap Cylinder Line

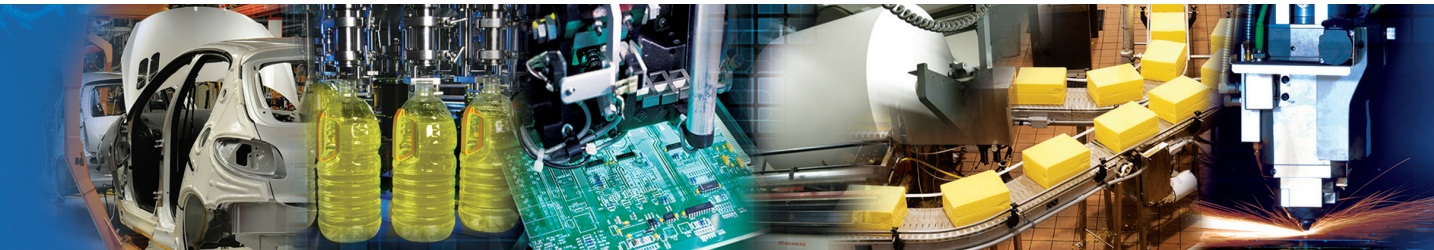

www.numatics.com


EMERSON™
Industrial Automation

BCAE
Automation Solutions

青岛秉诚自动化设备有限公司
地址：中国·青岛市重庆南路99号海尔云街甲3号楼7F

服务热线：4006-918-365
网址：<http://www.ivalve.cc>

传真：(86-532)585-10-365
Email：sales@bechinas.com

NUMATICS®

Numatics, Inc. is a leading manufacturer of pneumatic products and motion control products. Our broad spectrum of standard, custom developed products and application components have made a significant impact on pneumatic innovation as well as pneumatic and motion control technology. Our company has an extensive history of generating innovative concepts and technological breakthroughs. Many of today's standard features in pneumatic technology were industry firsts from Numatics. We continue our innovative approach to product development by developing electric motion control solutions and enhancing our embedded Fieldbus and I/O products to continually meet and solve our customer's application requirements.



Today Numatics is proud to be a part of the Industrial Automation Division of Emerson Electric Co.

Emerson (NYSE:EMR), based in St. Louis, Missouri (USA), is a global leader in bringing technology and engineering together to provide innovative solutions for customers in industrial, commercial, and consumer markets through its network power, process management, industrial automation, climate technologies, and appliance and tools businesses. For more information, visit www.Emerson.com.



EMERSON™
Industrial Automation



Numatics Express Shipping Program guarantees† product shipment in two, three or five business days. Unlike most traditional quick ship programs, the Numatics Express Shipping Program includes the most comprehensive offering in the industry. This program encompasses the range and options that you require!

Numatics is committed to offering you the highest level of customer service, quality and performance.

2DAY

Numatics Express 2Day shipping program guarantees† product shipment in two business days. The program includes the most popular valve, air preparation and actuator products and includes applicable switches and mounting accessories.

Numatics guarantees† to ship any order received before 3 pm EST for up to 10 2Day products* in two business days.

3DAY

Numatics Express shipping program offers a 3Day shipping program that guarantees† product shipment of a fully assembled and tested valve manifold in 3 business days. The program includes the most popular manifold configurations of the 2000 and Mark series valves:

- Sub D, Terminal Strip and Fieldbus Electronic Options
- Can be configured for DIN Rail Mounting and Muffled Exhaust
- Shipped complete and 100% tested

The 3Day Express shipping program enables you to create a 2 to 8 station manifold assembly complete with any combination of valves, regulators, and blank stations that can be configured from the valve model charts in this catalog.

Numatics guarantees† to ship any order received before 3 pm EST for up to 5 manifold assemblies configured from this catalog in three business days or Numatics pays the shipping cost.

5DAY

We are pleased to expand Numatics Express to include a broad range of products in a 5Day shipping program. Numatics guarantees† to ship up to 10 of any 5Day product** for orders received before 3 pm EST in 5 business days or Numatics pays the shipping cost.

We are committed to providing you with an unmatched level of customer service, quality, and reliability. If you cannot locate the specific product for your application or need additional product specifications, visit www.numatics.com or call 888-686-2842. Numatics Express orders cannot be canceled or adjusted once entered. Saturdays, Sundays, and Holidays are excluded.

†As industry requirements change, Numatics reserves the right to modify the contents of this catalog and program without notification. Updates on this program can be obtained from the Numatics website www.numatics.com or by calling 888-686-2842, or by contacting your local Numatics representative or distributor and referencing the Numatics Express program.


*Sentronic^D Proportional Valves, CGT Compact Slides, NR Series Rodless and Air Bellows are limited to orders up to 5.

**A Series Large Bore NFPA, ASP Series Steel Body NFPA and G Series Guide Rail Rodless are limited to orders up to 5.

Welcome to the World of Fluid Automation...

Since 1945, Numatics has emerged as the prominent specialist in developing and manufacturing pneumatic and fluid power components for a widely diverse field of automated industry. From idea to implementation, leading engineers choose Numatics as their single source for:

- Quality Fluid Power components
- Technologically advanced design resources
- Quick response time in delivery and service from around the world

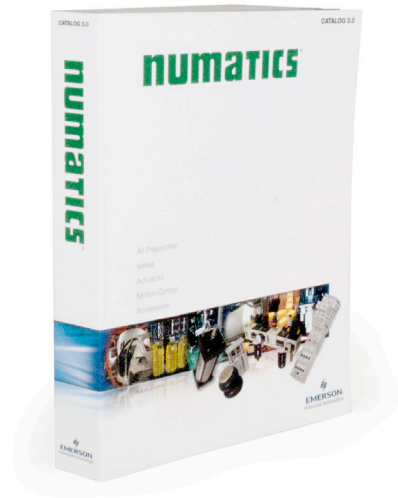

Numasizing®

Developed by Numatics, Numasizing® offers a whole new level of fluid power system optimization. Compare large amounts of component and process data against user objectives and industry benchmarks for the best possible size, pneumatic pressure, actuator stroke velocities and other part and process variable determinations.

CAD Modeling

Save critical development time with the most innovative CAD configuration program in the pneumatic component industry. Numatics in 3D eliminates the time consuming process associated with designing components from scratch based on information found in conventional paper catalogs.

The models are available in 85 different native CAD formats

in 2D drawings and 3D models, including all the popular formats including Catia, I-DEAS, Pro/Engineer, SolidWorks, Unigraphics and more.

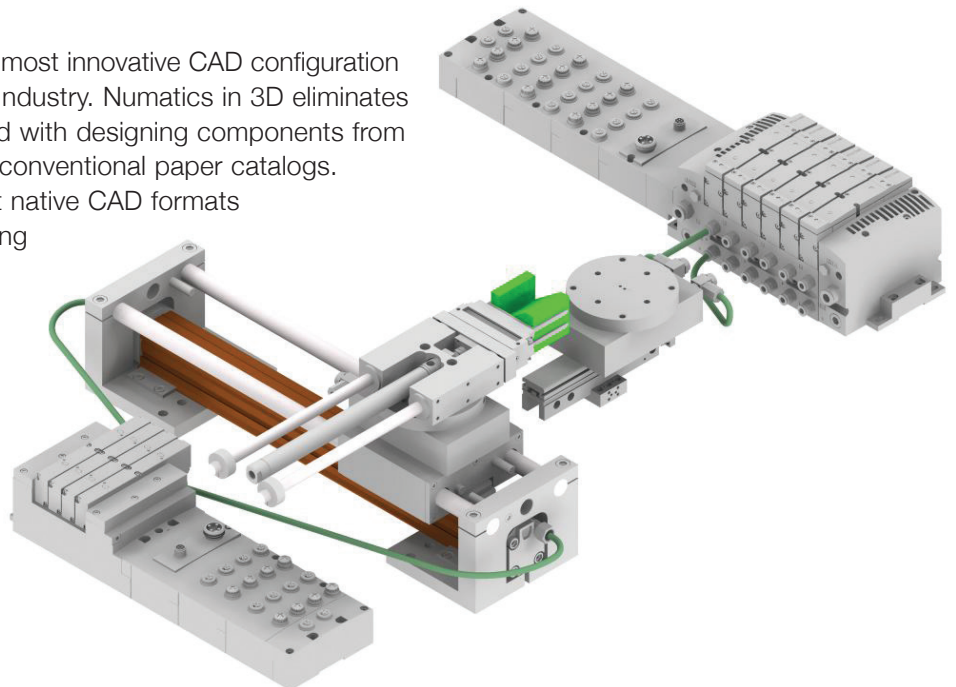


Table of Contents

Tiny Titan Series

Features and Benefits	3
How to Order	4
Optional Features	5
Basic and Front Flange Mounts	6
Front and Rear Flange Mounts	7
Nose Mounts	8
Fixed Eye and Front Tap Mounts	9
Side and Bottom Mount	10
Accessories	11
Rod Ends and Accessories	12
Global Switches	13-14
Sensing Part Numbers	15-17
Quick Disconnect Cables	18
How to Order - Tiny Titan Series Piston Rod Assembly	19
How to Order - Tiny Titan Series Repair Kit	20
How to Order - Tiny Titan Series Seal Kit	20
Piston Rod Assembly Kit Removal/Installation Instructions	21
Diagrams	22
Repair Kit Removal/Installation Instructions	23
Seal Kit Removal/Installation Instructions	24

The **Tiny Titan Series** is a small bore, square end cap cylinder line that is designed to excel in applications where space limitations are of the utmost importance. Furthermore, a multitude of mounting styles and piston options make the Tiny Titan an extremely accommodating cylinder line.

Tube

The **tube** is hard coat anodized on the inner diameter. This surface is extremely hard and possesses excellent wear and corrosion resistance, and has a low coefficient of friction. Additionally, profile tubing is standard on all bore sizes.

End Caps

The **end caps** are accurately machined from (6061-T6) solid aluminum bar stock. They are anodized for corrosion resistance. Additionally, a recess on the piston-mating surface (at both ends) enables the air to work on a larger piston area for effortless breakaway.

Rod Seal and Wiper

The unique **rod seal** and **wiper** combination is standard. The quad ring design ensures proper sealing and long life.

Tube End Seal

The **tube end seals** are compression type and reusable.

Ports

Our enhanced **port** design enables the cylinder to work more efficiently. Through the use of precise machining depths and tool shape, we are able to smooth the flow path into and out of the cylinder.

The Tiny Titan Series' **piston, piston rod, rod bushing, wear band, and rod seal** are directly correlated to the three different types of pistons that are offered: O Type, P Type, and Q Type.

O Type Piston


The **O Type Piston** (standard) is designed with a U-cup (Block-V) piston seal, a sintered bronze rod bushing, a roller burnished type 303 stainless steel piston rod, and a solid aluminum alloy piston that is strong and durable.

P Type Piston

The **P Type Piston** is a heavy-duty design. The piston seal is carboxylated nitrile with PTFE compound for self-lubrication. The "T" seal with back-up ring construction prevents rolling and seals at all pressures. Furthermore, this design includes a robust cast iron rod bushing, a high strength chrome plated carbon steel piston rod, a wear band, and a solid aluminum alloy piston that is strong and durable.

Q Type Piston

The **Q Type Piston** is a low profile design. The piston seal is a carboxylated nitrile with PTFE compound for self-lubricating. The "T" seal with back-up ring construction prevents rolling and seals at all pressures. It also has sintered bronze rod bushing, a roller burnished type 303 stainless steel piston rod, and a solid aluminum alloy piston that is strong and durable. A magnet cannot be added to the Q Type piston. Furthermore, a minimum of .625" of stroke is required.

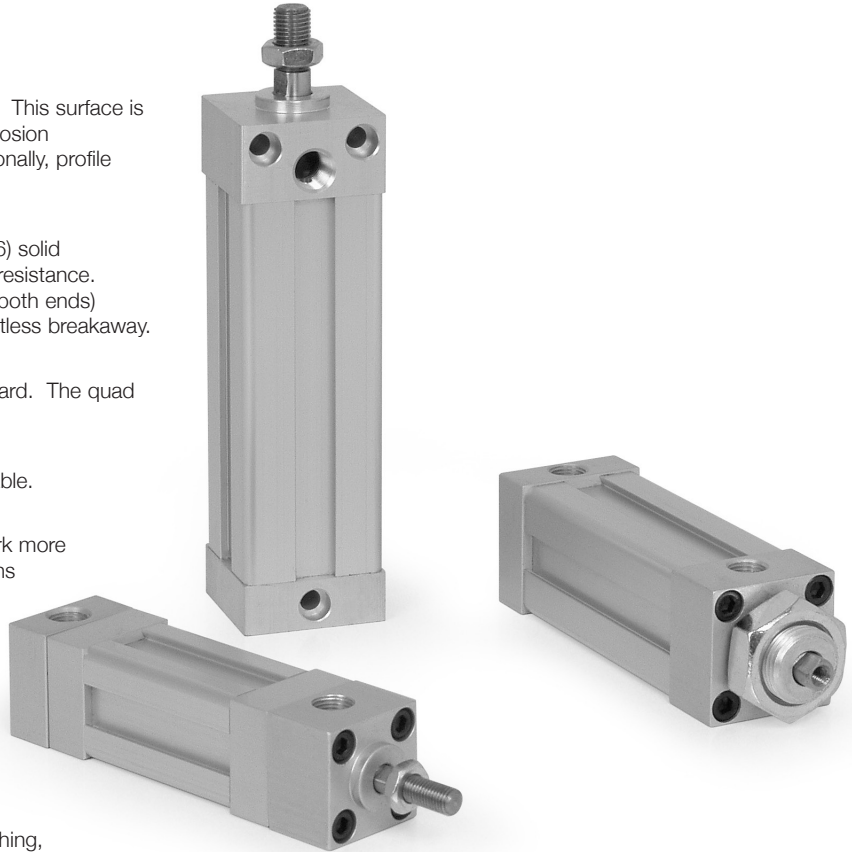

Standard Specifications:

- Bore sizes include 3/4", 1", 1-1/8"
- Maximum pressure rating is 150 psi air
- Standard temperature -10°F to 165°F (-23°C to 74°C)
- All aluminum construction
- 1/8" ports
- Flexible port locations
- O Type piston - U-cup
- P Type piston – heavy-duty (Standard)
- Q Type piston – low profile

How to Order

S8 0 C - 04 A 1 B - A AA 0

Mount

- F1 = Front Flange (Pilot)
- F2 = Rear Flange
- F7 = Front Flange
- N1 = Nose Mount
- N2 = Nose Mount (Pilot)
- P3 = Rear Eye Mount
- R1 = Sleeve Nut Mount
- S8 = Through Holes
- S9 = Bottom Tapped
- X0 = No Mount

Cylinder Type

- O = U-Cup Piston
- P = Heavy Duty Piston
- Q = Low Profile Piston

Bore

- C = 3/4"
- E = 1"
- G = 1-1/8"

Full Inches of Stroke

- 00 = 0" Stroke
- 01 = 1" Stroke
- 02 = 2" Stroke
- 03 = 3" Stroke
- 99 = 99" Stroke

Fractional Inches of Stroke

A = 0"	I = 1/2"
B = 1/16"	J = 9/16"
C = 1/8"	K = 5/8"
D = 3/16"	L = 11/16"
E = 1/4"	M = 3/4"
F = 5/16"	N = 13/16"
G = 3/8"	O = 7/8"
H = 7/16"	P = 15/16"

Magnetic Piston

- 0 = No Magnet
- 2* = Magnet

*Magnet not available on Q Type piston

Options

- AA = No Options
- EB* = Bumper Seal, Both Ends
- KA = Stroke Adjuster (1" Max. Adjustment)
- NA = Nickel Plated
- VA = FKM Seals
- 1A** = Rod Extension
- 2A** = Thread Extension
- 4A** = Stop Tube

*Requires a minimum of 100 psi for the rod to reach the full end of stroke with the EB option. EB option is not available on Q Type piston.

** Must specify length.

Cushions (1/2" Added Per End)

Position	1	2	3	4
No Cushion	A	A	A	A
Head and Cap	B	C	D	E
Head Only	F	G	H	J
Cap Only	K	L	M	N

NOTE: P type cap cushion not available.

Ports


Position	
1 (Std.)	B = 1/8 NPTF
2	H = 1/8 NPTF
3	N = 1/8 NPTF
4	T = 1/8 NPTF

Rod End Code

- 1 = #1 Standard Rod Diameter
- 2 = #2 Standard Rod Diameter
- 3 = #3 Standard Rod Diameter
- 6 = #1 Oversize Rod Diameter
- 7 = #2 Oversize Rod Diameter
- 8 = #3 Oversize Rod Diameter

Cylinder Forces

Cylinder Orientation



Ports Normally in Position 1


Force Chart

Pressure (PSI)

Bore		40	60	80	100	125	150
3/4"	Extend	17	26	35	44	55	66
	Retract (Std. Rod)	15	23	31	39	49	58
	Retract (Ov. Rod)	14	21	29	36	45	54
1"	Extend	31	47	62	78	98	117
	Retract (Std. Rod)	28	42	56	70	88	106
	Retract (Ov. Rod)	27	40	54	67	84	101
1 1/8"	Extend	39	59	79	99	124	149
	Retract (Std. Rod)	35	53	70	88	110	132
	Retract (Ov. Rod)	31	47	63	79	99	119


Optional Features

O Type Piston (Standard)

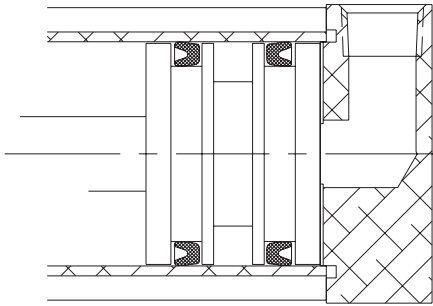


- U-cup (Block-V) piston seals
- Low breakaway
- Groove for optional magnet

O Type Cap Cushion

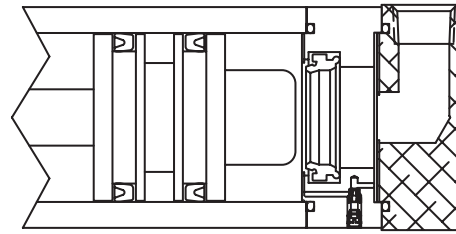


- The cushion seal has a built in check function. It seals in one direction and permits full flow in the opposite direction.
- Captured cushion needle
- Length grows by 1/2" per end

P Type Piston

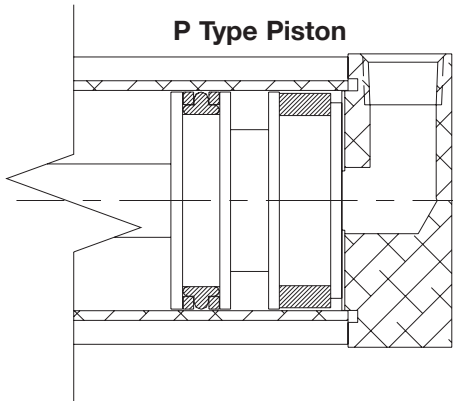


- Heavy duty
- Non-lube service
- T-seal piston
- Wear band
- Groove for optional magnet

Silencer Bumper Seal

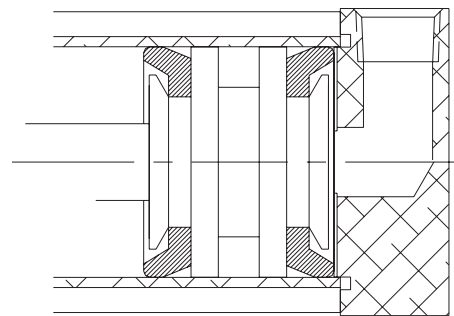


- Reduces end of stroke impact noise
- Bumper seal does not change cylinder overall length
- Cushions not available with this option
- Requires a minimum of 100 psi for the rod to reach the full end of stroke with the EB option.

Q Type Piston

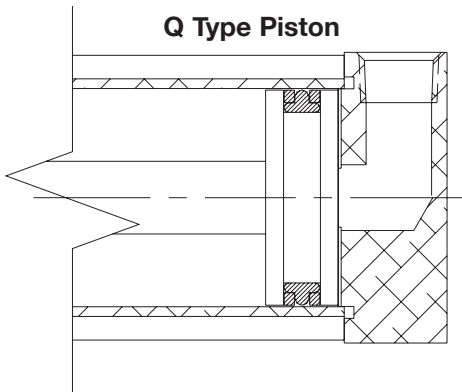

- Low profile design
- T-seal piston

Stroke Adjust

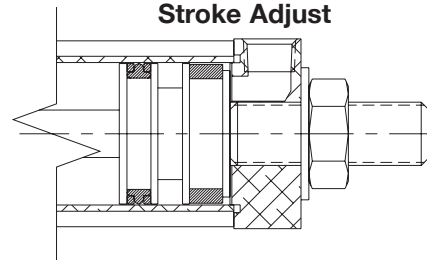


Bore	JA	JB	JC
3/4"	3/8-24	1.44	3/16
1" and 1-1/8"	1/2-20	1.44	1/4

- 1" maximum adjustment


Dimensions: Inches

Basic and Front Flange Mounts

Mount Code X0
(Basic No Mount)

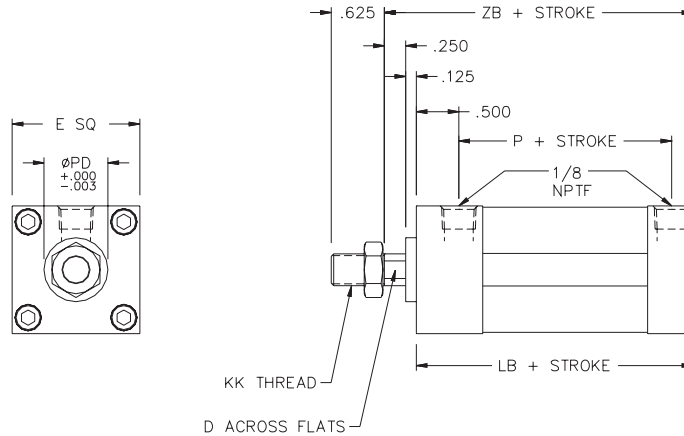

Mount Code F1
(Front Flange Mount with Pilot)

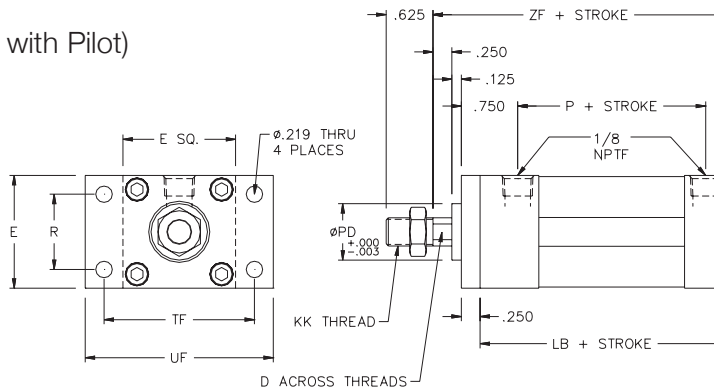

Bore	E	D	PD	KK**	R	TF	UF
3/4"	1.125	0.188	0.625	1/4-28	0.500	1.500	2.000
1"	1.375	0.250	0.750	5/16-24	0.875	1.875	2.375
1 1/8"	1.500	0.313	0.750	3/8-24	1.000	2.000	2.500

Stroke Related Dimensions

Series	O and P*				Q*			
	LB	P	ZB	ZF	LB	P	ZB	ZF
3/4"	2.250	1.500	2.625	2.875	1.750	1.000	2.125	2.375
1"	2.250	1.500	2.625	2.875	1.750	1.000	2.125	2.375
1 1/8"	2.250	1.500	2.625	2.875	1.750	1.000	2.125	2.375


* Cushions: Adds 1/2" per end to the OAL of the cylinder.

** Rod Ends: See next spread for rod end options.


Dimensions: Inches

Front and Rear Flange Mounts

Mount Code F2
(Rear Flange Mount)

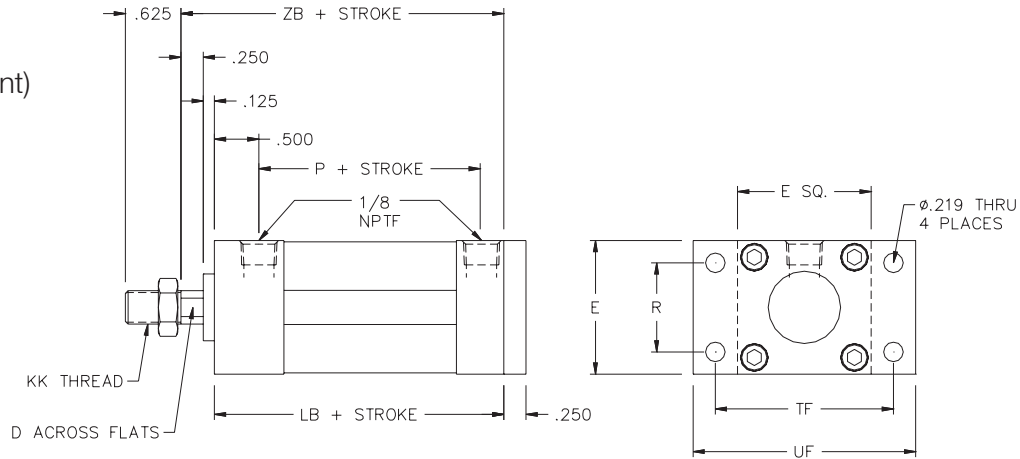

Mount Code F7
(Front Flange Mount)

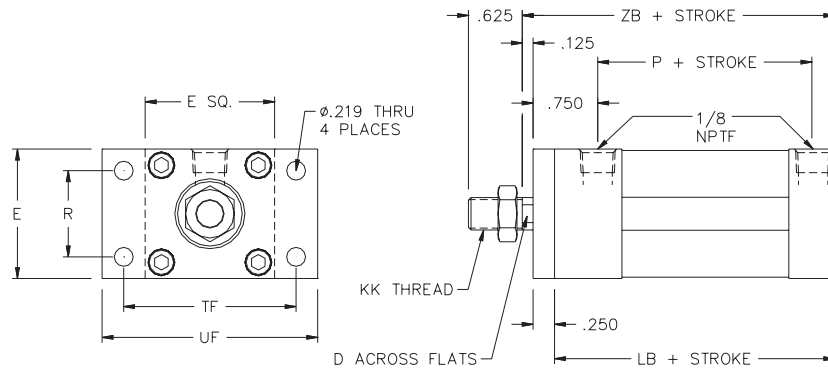

Bore	E	D	KK**	R	TF	UF
3/4"	1.125	0.188	1/4-28	0.500	1.500	2.000
1"	1.375	0.250	5/16-24	0.875	1.875	2.375
1 1/8"	1.500	0.313	3/8-24	1.000	2.000	2.500

Stroke Related Dimensions

Series	O and P*			Q*		
	LB	P	ZB	LB	P	ZB
Bore						
3/4"	2.250	1.500	2.625	1.750	1.000	2.125
1"	2.250	1.500	2.625	1.750	1.000	2.125
1 1/8"	2.250	1.500	2.625	1.750	1.000	2.125


* Cushions: Adds 1/2" per end to the OAL of the cylinder.

** Rod Ends: See next page for rod end options.

Dimensions: Inches


Nose Mounts

Mount Code N1
(Nose Mount)

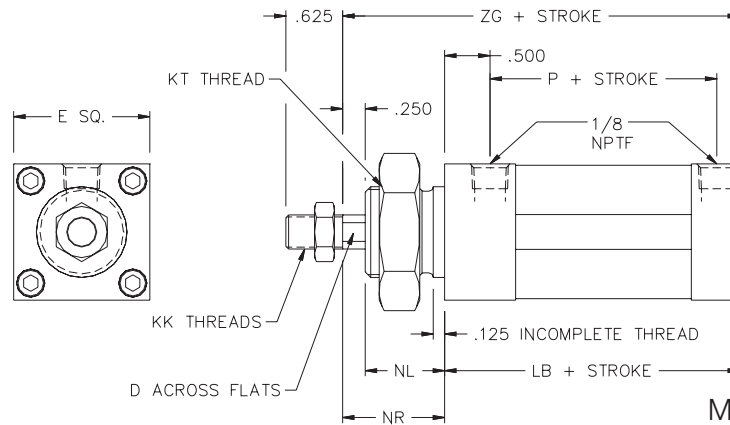

Mounting Nuts Included

Mount Code N2
(Nose Mount with Pilot)

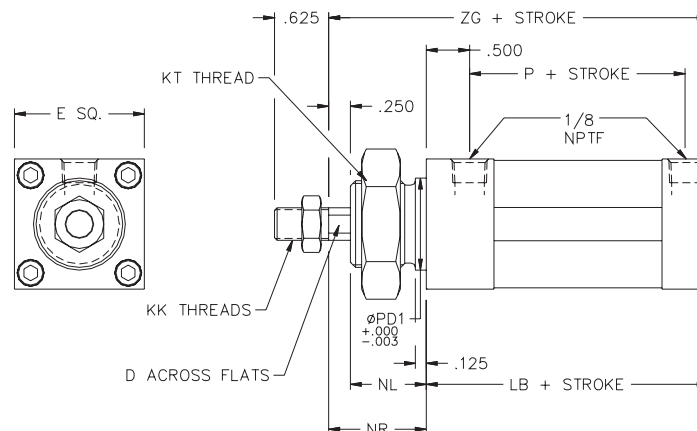

Mounting Nuts Included

Bore	E	D	PD1	KK**	KT	NL	NR
3/4"	1.125	0.188	0.625	1/4-28	5/8-18	0.625	0.875
1"	1.375	0.250	0.750	5/16-24	3/4-16	0.625	0.875
1 1/8"	1.500	0.313	0.750	3/8-24	1-14	0.875	1.125

Stroke Related Dimensions

Series	O and P*			Q*		
	LB	P	ZG	LB	P	ZG
Bore						
3/4"	2.250	1.500	3.125	1.750	1.000	2.125
1"	2.250	1.500	3.125	1.750	1.000	2.125
1 1/8"	2.250	1.500	3.375	1.750	1.000	2.125


* Cushions: Adds 1/2" per end to the OAL of the cylinder.

** Rod Ends: See page 12 for rod end options.


Dimensions: Inches

Fixed Eye and Front Tap Mounts

Mount Code P3
(Eye Mount)

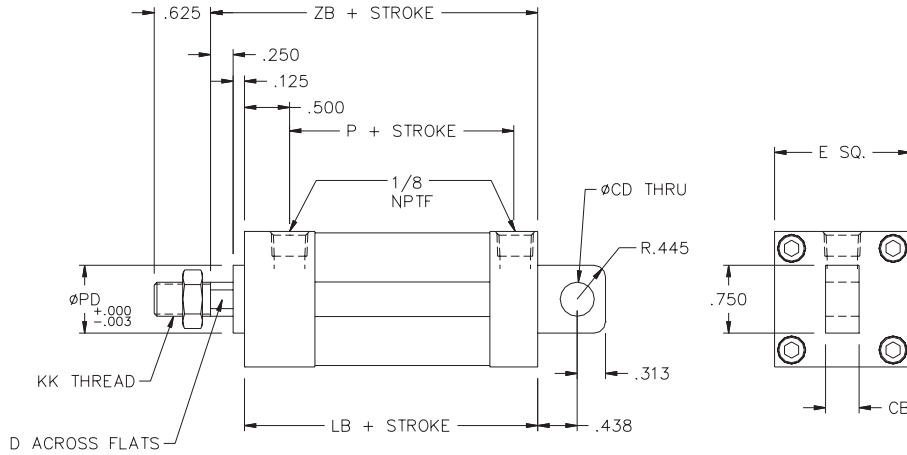

Mount Code R1
(Front Tapped Mount)

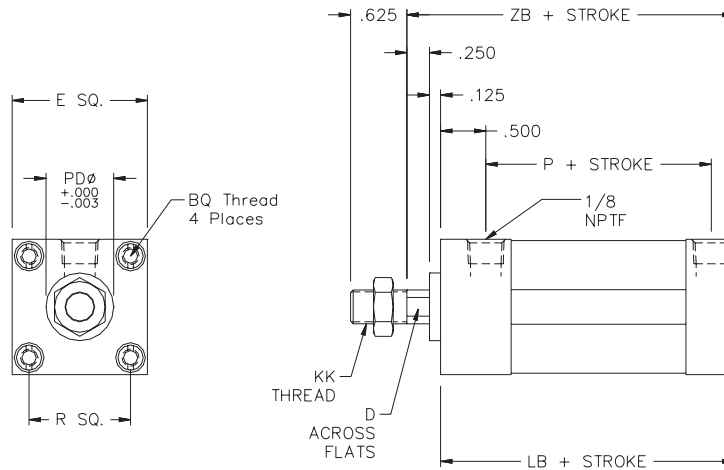

Bore	E	BQ	CB	CD	D	KK*	PD	R
3/4"	1.125	8-32 X 1/4 DEEP	0.250	0.250	0.188	1/4-28	0.625	0.750
1"	1.375	8-32 X 1/4 DEEP	0.375	0.375	0.250	5/16-24	0.750	1.000
1 1/8"	1.500	10-32 X 1/4 DEEP	0.375	0.375	0.313	3/8-24	0.750	1.125

Stroke Related Dimensions

Series	O and P*			Q*		
	LB	P	ZB	LB	P	ZB
Bore						
3/4"	2.250	1.500	2.625	1.750	1.000	2.125
1"	2.250	1.500	2.625	1.750	1.000	2.125
1 1/8"	2.250	1.500	2.625	1.750	1.000	2.125


* Cushions: Adds 1/2" per end to the OAL of the cylinder.

** Rod Ends: See page 12 for rod end options.


Dimensions: Inches

Side and Bottom Mount

Mount Code S8
(Side Mount)
Standard ports in
position # 1. Consult
factory for details.

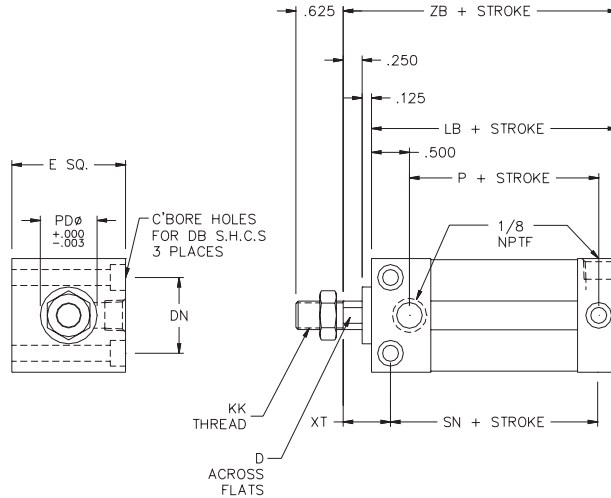

Mount Code S9
(Bottom Tapped Mount)
Standard ports in
position # 1. Consult
factory for details.

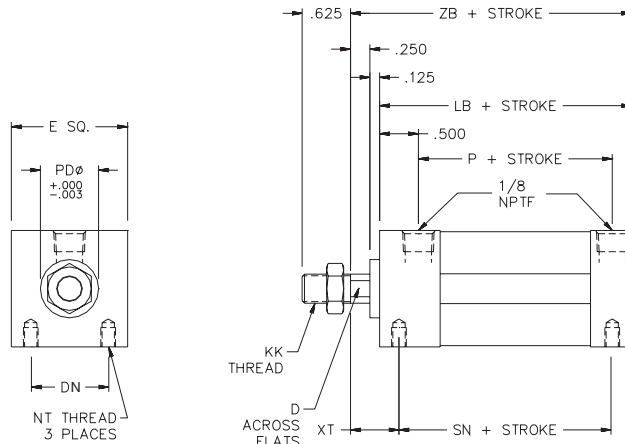

Bore	E	D	DB	DN	PD	KK**	NT	XT
3/4"	1.125	0.188	#8	0.625	0.625	1/4-28	8-32 X .18 DEEP	0.563
1"	1.375	0.250	#10	0.875	0.750	5/16-24	10-32 X .25 DEEP	0.625
1 1/8"	1.500	0.313	#10	1.000	0.750	3/8-24	10-32 X .25 DEEP	0.625

Stroke Related Dimensions


Series	O and P*				Q*			
	LB	P	SN	ZB	LB	P	SN	ZB
Bore								
3/4"	2.250	1.500	1.812	2.625	1.750	1.000	1.312	2.125
1"	2.250	1.500	1.750	2.625	1.750	1.000	1.250	2.125
1 1/8"	2.250	1.500	1.750	2.625	1.750	1.000	1.250	2.125

* Cushions: Adds 1/2" per end to the OAL of the cylinder.

** Rod Ends: See page 12 for rod end options.

Accessories

Rod Eye

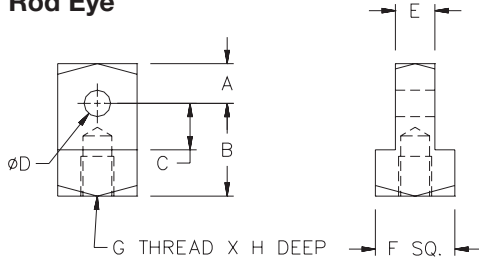


Part No.	A	B	C	D	E	F		H
P26-C01	0.250	0.750	0.438	0.250	0.250	0.500	1/4-28	0.280
P26-E01	0.375	0.875	0.438	0.375	0.375	0.750	5/16-24	0.380
P26-E02	0.375	0.875	0.438	0.250	0.375	0.750	5/16-24	0.380
P26-G01	0.375	0.875	0.438	0.375	0.375	0.750	3/8-24	0.310
P26-G02	0.375	0.875	0.438	0.250	0.375	0.750	3/8-24	0.310

* Parts are zinc plated steel

Rod Clevis

(Pivot Pin Included)

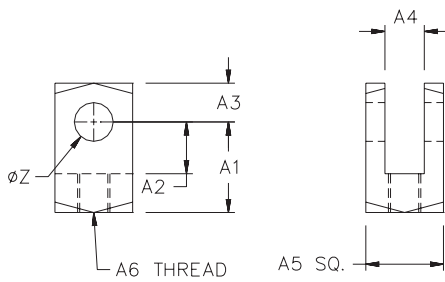


Part No.	Z	A1	A2	A3	A4	A5	A6
P500-301	0.250	0.812	0.500	0.250	0.250	0.500	1/4-28
P500-302	0.375	0.875	0.500	0.375	0.375	0.750	5/16-24
P500-303	0.250	0.875	0.500	0.375	0.375	0.750	5/16-24
P500-304	0.375	0.875	0.500	0.375	0.375	0.750	3/8-24
P500-305	0.250	0.875	0.500	0.375	0.375	0.750	3/8-24

* Parts are zinc plated steel

Clevis Bracket


(Pivot Pin Included)

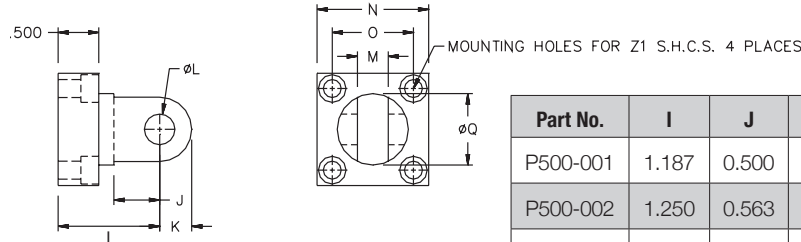

Part No.	I	J	K	L	M	N	O	Q	Z1
P500-001	1.187	0.500	0.250	0.250	0.250	1.125	0.750	0.750	#6
P500-002	1.250	0.563	0.375	0.375	0.375	1.375	1.000	0.875	#10
P500-003	1.250	0.563	0.375	0.250	0.375	1.375	1.000	0.875	#10

* Parts are zinc plated steel

Eye Bracket


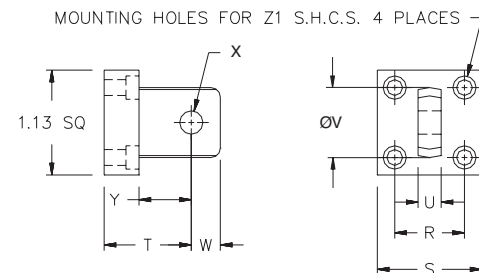


Part No.	R	S	T	U	V	W	X	Y	Z1
P30-C01	0.75	1.125	0.937	0.250	0.750	0.312	0.250	0.56	#6
P30-E01	1.000	1.375	0.937	0.375	0.750	0.312	0.375	0.56	#10
P30-E02	1.000	1.375	0.937	0.375	0.750	0.312	0.250	0.56	#10

* Parts are zinc plated steel

Rod Ends and Accessories


Rod Ends

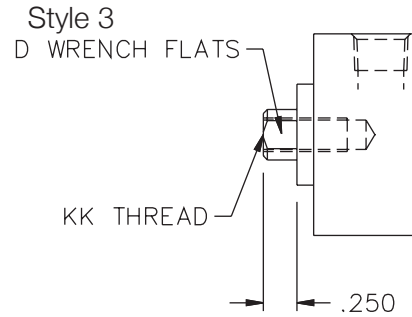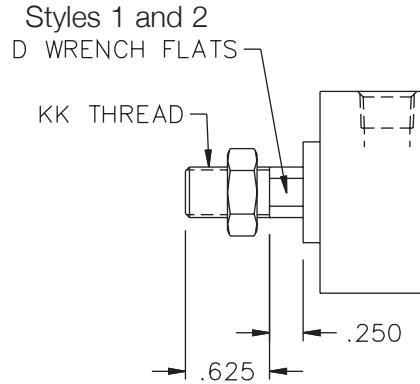

Jam nuts included with Style 1 and Style 2 rod ends.


Bore	Rod	Style 1	Style 2	Style 3	D
3/4"	0.250	1/4-28	1/4-20	6-32 X .44 DEEP	0.188
3/4"	0.312	5/16-24	5/16-18	10-32 X .63 DEEP	0.250
1"	0.312	5/16-24	5/16-18	10-32 X .63 DEEP	0.250
1"	0.375	3/8-24	3/8-16	1/4-28 X .63 DEEP	0.312
1 1/8"	0.375	3/8-24	3/8-16	1/4-28 X .63 DEEP	0.312
1 1/8"	0.500	1/2-20	1/2-13	3/8-24 X .63 DEEP	0.438

Rod Couplers

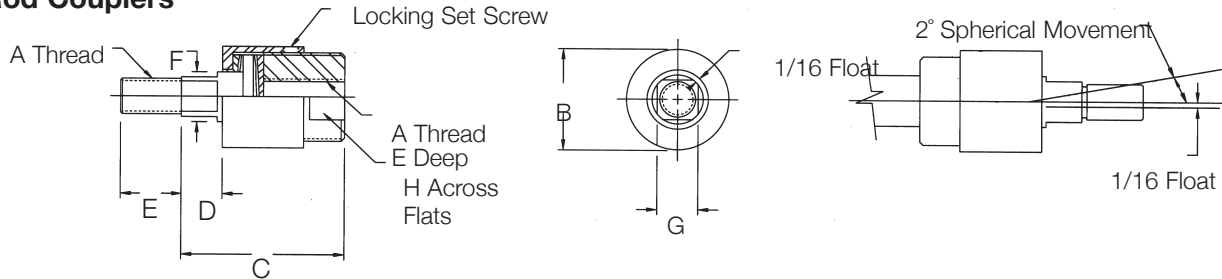


Part No.	A	B	C	D	E	F	G	H
A500-600	1/4-28	7/8	1-1/4	1/4	5/8	5/16	3/16	3/4
A500-601	5/16-24	7/8	1-1/4	1/4	5/8	5/16	1/4	3/4
A500-602	3/8-24	7/8	1-1/4	1/4	5/8	5/16	5/16	3/4
A500-604	1/2-20	1-1/4	2	1/2	3/4	5/8	1/2	1

Pivot Pin



Part No.	A	B
P500-401	0.984	0.250
P500-403	0.891	0.375

Hex Nuts

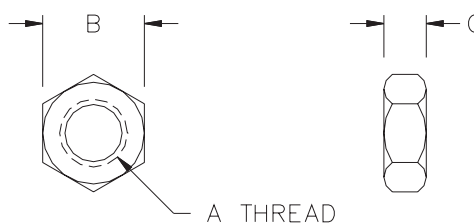

Part No.	A	B	C
N90-1093	1/4-20	0.44	0.16
M190001	1/4-28	0.44	0.16
N90-1094	5/16-18	0.50	0.19
M18-004	5/16-24	0.50	0.19
N90-1062	3/8-16	0.56	0.22
M190002	3/8-24	0.56	0.22
N90-1095	1/2-13	0.75	0.31
M190004	1/2-20	0.75	0.31
M190005	5/8-18	0.94	0.38
M190006	3/4-16	1.12	0.42
M190008	1-14	1.50	0.55

* Parts are zinc plated steel


* Parts are zinc plated steel 11

Information subject to change without notice. For ordering information or regarding your local sales office visit www.numatics.com.

Tiny Titan series Global application Detail

Profile Tube Detail

- 1. Global Switch
- 2. Included Dovetail adapter
- 3. Dove Tail extrusion




Tiny Titan Series World Switch Bracket

Cylinders	Bore	Part Number
Tiny Titan series	All	Direct Fit


Tiny Titan Series World Switch Hall Effect Part Numbers

P/N	Switch Style	Electrical Design	Output	Operating Voltage	Current Rating	Switching Power	Voltage Drop	NEMA IP Rating	Temperature Rating
SH6-031	Flying Lead	PNP	Normally Open	6-24 VDC	0.3 Amps Max.	7.2 Watts Max.	.5 Volts	NEMA 6	-25° to +75° C
SH6-032	Flying Lead	NPN	Normally Open	6-24 VDC	0.3 Amps Max.	7.2 Watts Max.	.5 Volts	NEMA 6	-25° to +75° C
SH6-021	M8 Connector	PNP	Normally Open	6-24 VDC	0.3 Amps Max.	7.2 Watts Max.	.5 Volts	NEMA 6	-25° to +75° C
SH6-022	M8 Connector	NPN	Normally Open	6-24 VDC	0.3 Amps Max.	7.2 Watts Max.	.5 Volts	NEMA 6	-25° to +75° C


Hall Effect Switch

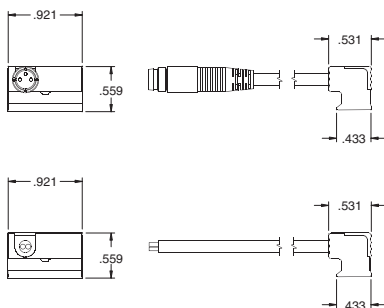

PNP Sourcing

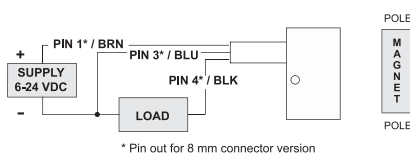


NPN Sinking

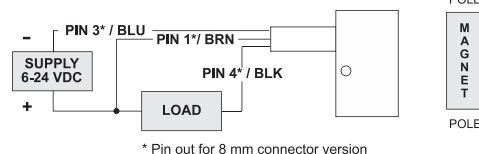

Tiny Titan Series World Switch Reed Switch Part Numbers


P/N	Switch Style	Electrical Design	Output	Operating Voltage	Current Rating	Switching Power	Voltage Drop	NEMA IP Rating	Temperature Rating
SR6-002	Flying Lead	AC/DC REED	Normally Open	5-120 VAC/DC	0.025 Amps Max. 0.001 Amps Min.	3 Watts Max.	3.5 Volts	NEMA 6	-25° to +75° C
SR6-004	Flying Lead	AC/DC REED	Normally Open	5-120 VAC/DC	0.5 Amps Max. 0.005 Amps Min.	10 Watts Max.	3.0 Volts	NEMA 6	-25° to +75° C
SR6-022	M8 Connector	AC/DC REED	Normally Open	5-50 VAC 5-60 VDC	0.025 Amps Max. 0.001 Amps Min.	3 Watts Max.	.5 Volts	NEMA 6	-25° to +75° C
SR6-024	M8 Connector	AC/DC REED	Normally Open	5-50 VAC 5-60 VDC	0.5 Amps Max. 0.005 Amps Min.	10 Watts Max.	3.0 Volts	NEMA 6	-25° to +75° C

Reed Switch - Normally Open Type SR6

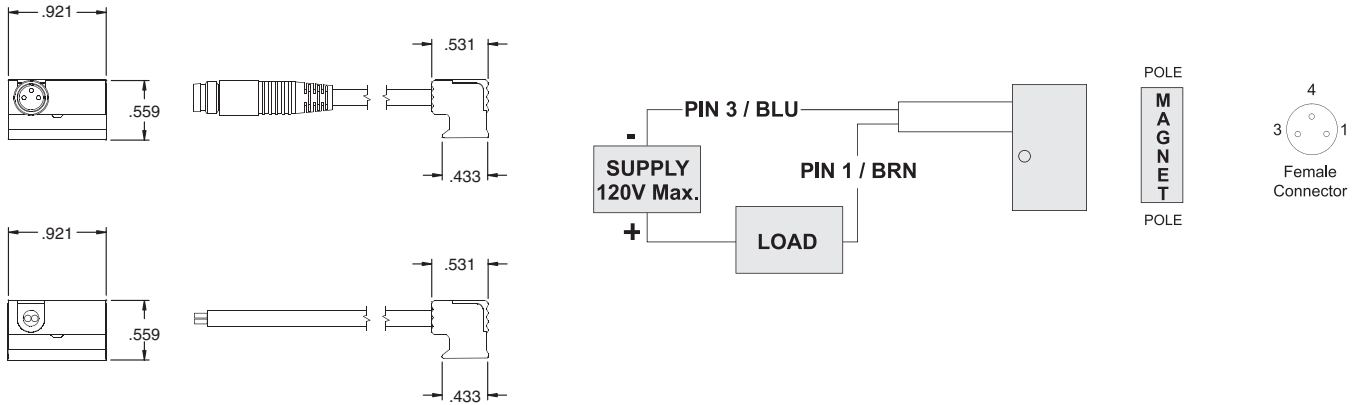

Tiny Titan Series (Profile)

Bore	Bracket P/N
3/4"	N99-1185
1"	N99-1185
1 1/8"	N99-1185

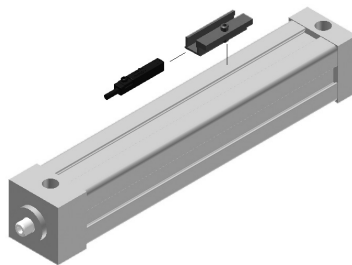


Sensor Description	Standard Cord Set	Quick Disconnect
Reed Switch	REED-FL2-00	REED-QDS-M8U
Hall PNP	PNP-FL2-00-U	PNP-QDS-M8-U
Hall NPN	NPN-FL2-00-U	NPN-QDS-M8-U


See page 15, 16, & 17 for sensor specifications

Sensing Part Numbers

PNP-FL2-00-U

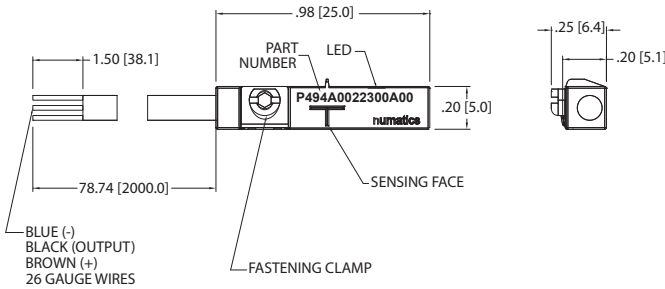

PNP-QDS-M8-U

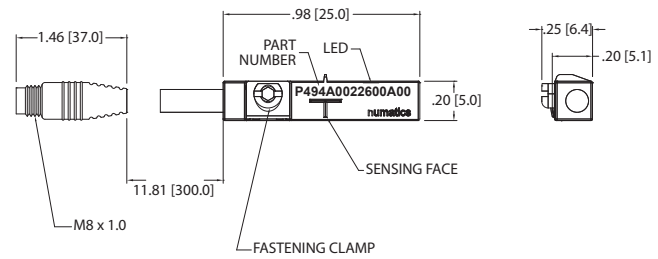



ELECTRICAL DESIGN	DC PNP
OUTPUT	Normally Open
OPERATING VOLTAGE	10-30 VDC
CURRENT RATING	100 mA
SHORT-CIRCUIT PROTECTION	Yes
OVERLOAD PROTECTION	Yes
REVERSE POLARITY PROTECTION	Yes
VOLTAGE DROP	< 2.5 V
CURRENT CONSUMPTION	< 12 mA
REPEATABILITY	< .2mm
POWER-ON DELAY TIME	< 30 ms
SWITCH FREQUENCY	> 3000 Hz
AMBIENT TEMPERATURE	-25°C to 85°C
PROTECTION	IP 67, III
HYSTERESIS	1.0mm
MAGNETIC SENSITIVITY	2.0 mT
TRAVEL SPEED	> 10 m/s
HOUSING MATERIAL	PA (Polyamide) Black; Fastening Clamp: Stainless Steel
FUNCTION DISPLAY SWITCHING STATUS	Yellow LED
CONNECTION	Flying Leads, Pur Cable (2m Long, 3 x26 Gauge Wire)
REMARKS	Clamping Screw with Combined Slot/Hexagon Socket Head AF 1.5 cULus - Class 2 Source Required
ACCESSORIES	Rubber Placeholder, Cable Clip, and Cut Sheet To Be Provided with Every Switch
AGENCY APPROVALS	

ELECTRICAL DESIGN	DC PNP
OUTPUT	Normally Open
OPERATING VOLTAGE	10-30 VDC
CURRENT RATING	100 mA
SHORT-CIRCUIT PROTECTION	Yes
OVERLOAD PROTECTION	Yes
REVERSE POLARITY PROTECTION	Yes
VOLTAGE DROP	< 2.5 V
CURRENT CONSUMPTION	< 12 mA
REPEATABILITY	< .2mm
POWER-ON DELAY TIME	< 30 ms
SWITCH FREQUENCY	> 3000 Hz
AMBIENT TEMPERATURE	-25°C to 85°C
PROTECTION	IP 67, III
HYSTERESIS	1.0mm
MAGNETIC SENSITIVITY	2.0 mT
TRAVEL SPEED	> 10 m/s
HOUSING MATERIAL	PA (Polyamide) Black; Fastening Clamp: Stainless Steel
FUNCTION DISPLAY SWITCHING STATUS	Yellow LED
CONNECTION	M8 Connector (Snap Fit) , Pur Cable (.3 m)
REMARKS	Clamping Screw with Combined Slot/Hexagon Socket Head AF 1.5 cULus - Class 2 Source Required
ACCESSORIES	Rubber Placeholder, Cable Clip, and Cut Sheet To Be Provided with Every Switch
AGENCY APPROVALS	

14 *Switches are not designed for wet environments. Please see your distributor for additional information.

Information subject to change without notice. For ordering information or regarding your local sales office visit www.numatics.com.

Sensing Part Numbers

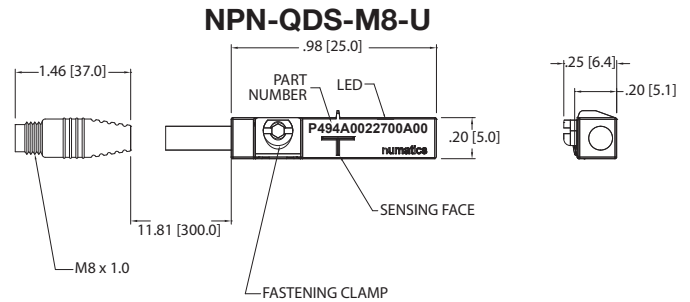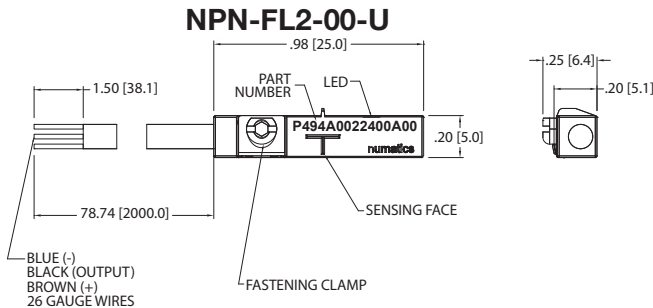


ELECTRICAL DESIGN	DC NPN
OUTPUT	Normally Open
OPERATING VOLTAGE	10-30 VDC
CURRENT RATING	100 mA
SHORT-CIRCUIT PROTECTION	Yes
OVERLOAD PROTECTION	Yes
REVERSE POLARITY PROTECTION	Yes
VOLTAGE DROP	< 2.5 V
CURRENT CONSUMPTION	< 12 mA
REPEATABILITY	< .2mm
POWER-ON DELAY TIME	< 30 ms
SWITCH FREQUENCY	> 3000 Hz
AMBIENT TEMPERATURE	-25°C to 85°C
PROTECTION	IP 67, III
HYSTERESIS	1.0mm
MAGNETIC SENSITIVITY	2.0 mT
TRAVEL SPEED	> 10 m/s
HOUSING MATERIAL	PA (Polyamide) Black; Fastening Clamp: Stainless Steel
FUNCTION DISPLAY SWITCHING STATUS	Yellow LED
CONNECTION	Flying Leads, Pur Cable (2m Long, 3 x26 Gauge Wire)
REMARKS	Clamping Screw with Combined Slot/Hexagon Socket Head AF 1.5 cULus - Class 2 Source Required
ACCESSORIES	Rubber Placeholder, Cable Clip, and Cut Sheet To Be Provided with Every Switch
AGENCY APPROVALS	

ELECTRICAL DESIGN	DC NPN
OUTPUT	Normally Open
OPERATING VOLTAGE	10-30 VDC
CURRENT RATING	100 mA
SHORT-CIRCUIT PROTECTION	Yes
OVERLOAD PROTECTION	Yes
REVERSE POLARITY PROTECTION	Yes
VOLTAGE DROP	< 2.5 V
CURRENT CONSUMPTION	< 12 mA
REPEATABILITY	< .2mm
POWER-ON DELAY TIME	< 30 ms
SWITCH FREQUENCY	> 3000 Hz
AMBIENT TEMPERATURE	-25°C to 85°C
PROTECTION	IP 67, III
HYSTERESIS	1.0mm
MAGNETIC SENSITIVITY	2.0 mT
TRAVEL SPEED	> 10 m/s
HOUSING MATERIAL	PA (Polyamide) Black; Fastening Clamp: Stainless Steel
FUNCTION DISPLAY SWITCHING STATUS	Yellow LED
CONNECTION	M8 Connector (Snap Fit) , Pur Cable (.3 m)
REMARKS	Clamping Screw with Combined Slot/Hexagon Socket Head AF 1.5 cULus - Class 2 Source Required
ACCESSORIES	Rubber Placeholder, Cable Clip, and Cut Sheet To Be Provided with Every Switch
AGENCY APPROVALS	


*Switches are not designed for wet environments. Please see your distributor for additional information.


Sensing Part Numbers


REED-FL2-00

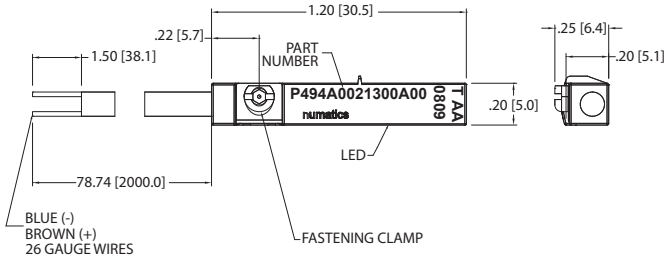

REED-QDS-M8U

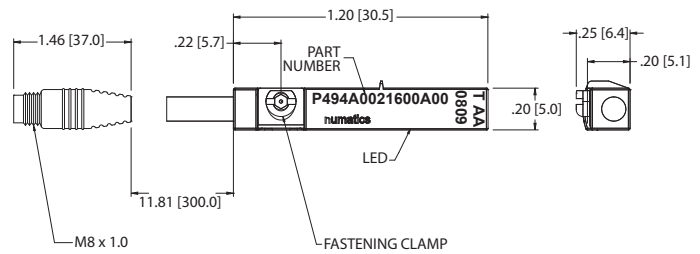


ELECTRICAL DESIGN	AC/DC REED
OUTPUT	Normally Open
OPERATING VOLTAGE	5-120 VAC/DC
CURRENT RATING	100 mA*
SHORT-CIRCUIT PROTECTION	No
OVERLOAD PROTECTION	No
REVERSE POLARITY PROTECTION	Yes
VOLTAGE DROP	< 5 V
REPEATABILITY	± .2mm
MAKETIME INCLUDING BOUNCE	< .6 ms
BREAKTIME	< .1 ms
SWITCHING POWER (MAX)	5 W
SWITCH FREQUENCY	1000 Hz
AMBIENT TEMPERATURE	-25°C to 70°C
PROTECTION	IP 67, II
HYSTERESIS	.9mm
HOUSING MATERIAL	PA (Polyamide) Black; Fastening Clamp: Stainless Steel
FUNCTION DISPLAY SWITCHING STATUS	Yellow LED
CONNECTION	Flying Leads, Pur Cable (2m Long, 2 x26 Gauge Wire)
REMARKS	*External Protective Circuit for Inductive Load (Valve, Contactor, Etc..) Necessary. Conforms to 2008 NEC Section 725 III, Class 2 Circuits Clamping Screw with Combined Slot/Hexagon Socket Head AF 1.5. No LED Function in case of Polarity in DC Operation
ACCESSORIES	Rubber Placeholder, Cable Clip, and Cut Sheet To Be Provided with Every Switch
AGENCY APPROVALS	 RoHS

ELECTRICAL DESIGN	AC/DC REED
OUTPUT	Normally Open
OPERATING VOLTAGE	*5-60 VDC / 5-50 VAC
CURRENT RATING	100 mA
SHORT-CIRCUIT PROTECTION	No
OVERLOAD PROTECTION	No
REVERSE POLARITY PROTECTION	Yes
VOLTAGE DROP	< 5 V
REPEATABILITY	± .2mm
MAKETIME INCLUDING BOUNCE	< .6 ms
BREAKTIME	< .1 ms
SWITCHING POWER (MAX)	5 W
SWITCH FREQUENCY	1000 Hz
AMBIENT TEMPERATURE	-25°C to 70°C
PROTECTION	IP 67, II
HYSTERESIS	.9mm
HOUSING MATERIAL	PA (Polyamide) Black; Fastening Clamp: Stainless Steel
FUNCTION DISPLAY SWITCHING STATUS	Yellow LED
CONNECTION	M8 Connector (Snap Fit), Pur Cable (.3m)
REMARKS	*External Protective Circuit for Inductive Load (Valve, Contactor, Etc..) Necessary. Conforms to 2008 NEC Section 725 III, Class 2 Circuits M8 Connector voltage limited to 5-60 vdc / 5-50 vac to conform with 2008 IEC 61076-2-104 Clamping Screw with Combined Slot/Hexagon Socket Head AF 1.5. No LED Function in case of Polarity in DC Operation
ACCESSORIES	Rubber Placeholder, Cable Clip, and Cut Sheet To Be Provided with Every Switch
AGENCY APPROVALS	 RoHS

16 *Switches are not designed for wet environments. Please see your distributor for additional information.

Quick Disconnect Cables

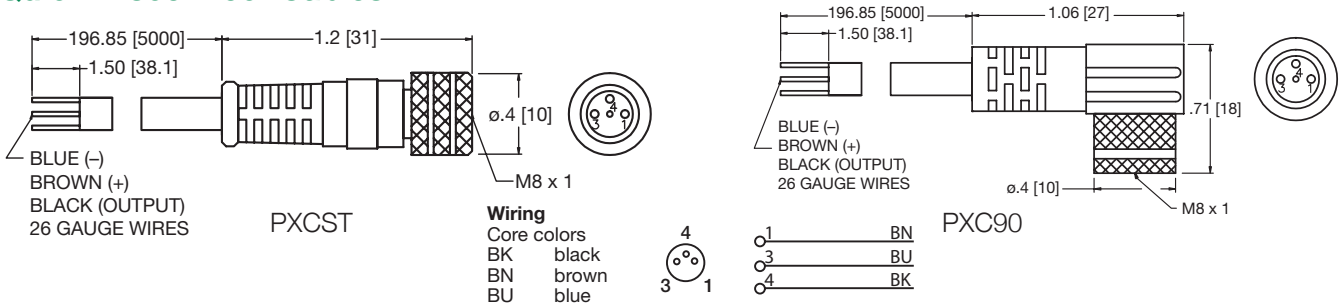

Order Code	Type	Operating Voltage	Current Rating	Cable Material	Protection	Connector
PXCST	Straight 5 m Cable (3 x 26 Gauge wire)	60 AC/75 DC	3 A	PUR	IP 68, III	M8
PXC90	90° 5 m Cable (3 x 26 Gauge wire)	60 AC/75 DC	3 A	PUR	IP 68, III	M8

How to Order - Tiny Titan Series Piston Rod Assembly

P92 - G 1 1 N 0 - 01 A - AA

Type

- O92 = U-Cup Piston Rod Assembly
- P92 = Heavy Duty Piston Rod Assembly
- Q92 = Low Profile Piston Rod Assembly

Bore

- C = 3/4"
- E = 1"
- G = 1-1/8"

Rod Code

- 1 = Style #1 Standard Rod Diameter
- 2 = Style #2 Standard Rod Diameter
- 3 = Style #3 Standard Rod Diameter
- 6 = Style #1 Oversize Rod Diameter
- 7 = Style #2 Oversize Rod Diameter
- 8 = Style #3 Oversize Rod Diameter

Mount

- 1 = All Mounts Except F1, N1, and N2
- 2 = F1 Mount
- 3 = N1 and N2 Mount

Cushion

- N = No Cushion
- B = Both Ends Cushioned
- H = Head End Cushioned
- C = Cap End Cushioned

Magnet

- 0 = No Magnet
- 2 = Reed Magnet

Option

- AA = No Option
- EB = Silencer Bumpers
- KA = Stroke Adjuster
- NA = Nickel Plated
- 1A* = Rod Extension
- 2A* = Thread Extension
- 4A* = Stop Tube
- * Specify Length

Fractional Inches of Stroke

- A = 0" I = 1/2"
 - B = 1/16" J = 9/16"
 - C = 1/8" K = 5/8"
 - D = 3/16" L = 11/16"
 - E = 1/4" M = 3/4"
 - F = 5/16" N = 13/16"
 - G = 3/8" O = 7/8"
 - H = 7/16" P = 15/16"
- Note: 1/8" minimum stroke.

Full Inch of Stroke

- 00 = 0" Stroke
- 01 = 1" Stroke
- 02 = 2" Stroke
- 03 = 3" Stroke
- 04 = 4" Stroke
- 10 = 10" Stroke


Note: Options listed are ones that apply to a piston rod assembly only.
Model number is set up to use option code supplied with original cylinder or with any above.

Rod End Styles, Diameters and Threads

Bore	Rod	Style 1	Style 2	Style 3
3/4"	0.250	1/4-28	1/4-20	6-32 X .44
3/4"	0.312	5/16-24	5/16-18	10-32 X .63
1"	0.312	5/16-24	5/16-18	10-32 X .63
1"	0.375	3/8-24	3/8-16	1/4-28 X .63
1-1/8"	0.375	3/8-24	3/8-16	1/4-28 X .63
1-1/8"	0.500	1/2-20	1/2-13	3/8-24 X .63


Jam nuts included with Style 1 and Style 2 rod ends.

How to Order - Tiny Titan Series Repair Kit

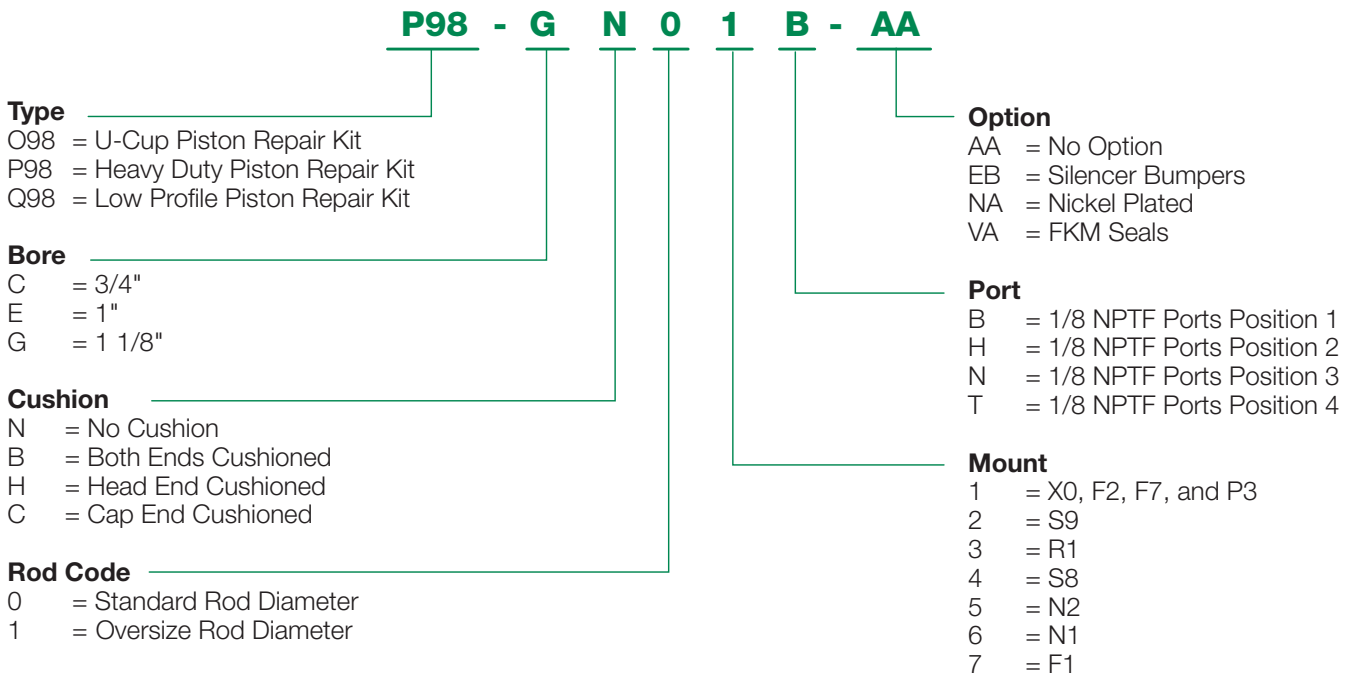

Note: Options listed are ones that apply to a repair kit only.
Model number is set up to use option code supplied with original cylinder or with any above.

How to Order - Tiny Titan Series Seal Kit

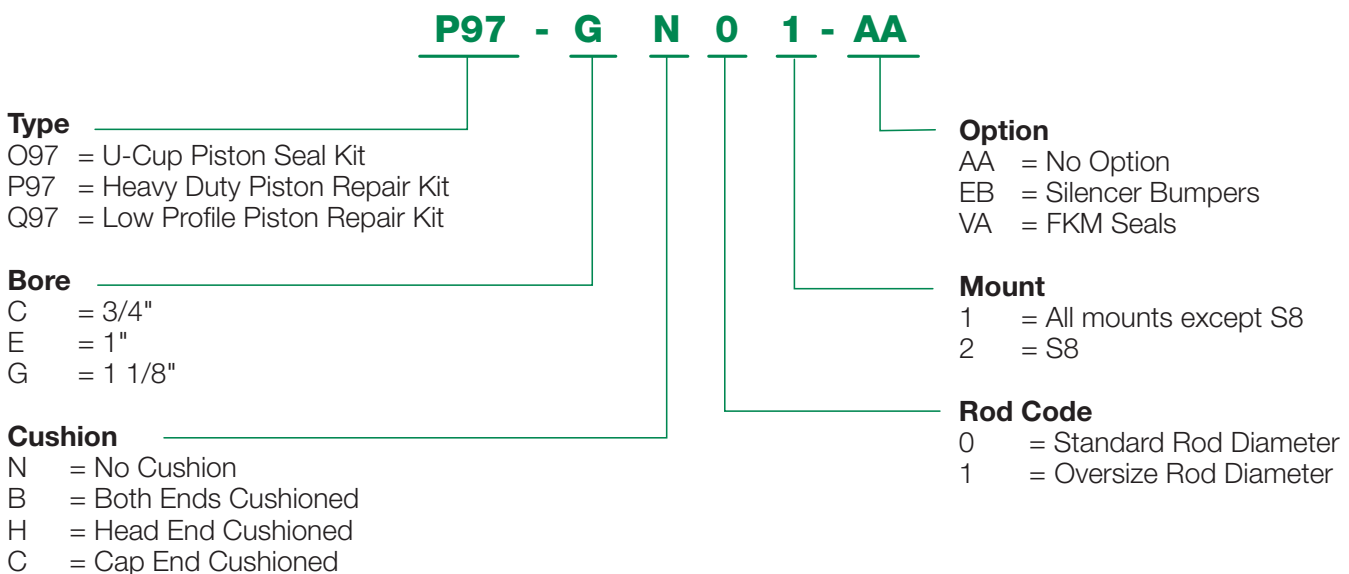


Note: Options listed are ones that apply to a seal kit only.
Model number is set up to use option code supplied with original cylinder or with any above.

Piston Rod Assembly Kit Removal/Installation Instructions

1. Loosen 8 Socket Head Cap Screws (SHCS) (Part #16) to remove Head (Part #1), Piston/Rod Assembly (Part #9 & #10), and Cushion Block (Part #6) if cylinder is cushioned.
2. Carefully remove old seals and wearband (Part #2, #11, #14). Depending on the cylinder type, piston seal(s) and wearband will vary. Any damage to the seal grooves may result in leakage.
3. Lubricate new seals and Wearband (Part #14) with supplied Numatics' Lube. Examine seals before installing for any contamination. Contamination may cause leakage.
4. Install Piston Seal(s) (Part #11). Depending on the cylinder type, piston seal(s) will vary. Make sure the piston seal is not twisted inside groove. If cylinder type is P or Q, install back-up rings (Part #12). See Seal Installation Guide.
5. Install lubricated wearbands onto piston/rod assembly if cylinder type is P. Sink piston assembly into sinker tube. See Sinker Tube Part Numbers Chart.
6. Apply lube inside the cylinder tube.
7. Sink piston/rod assembly into cylinder tube.
8. Press piston/rod assembly flush with the cylinder tube. Wipe off any lube from the face of the piston.
9. Place Tube End Seals (Part #2) into head seal grooves. Examine seals after installing for any contamination. Contamination may cause leakage.
10. Lightly grease Rod Seal (Part #4) in the head before reassembling the cylinder. This will ease the installation of the head over the rod.
11. Carefully place head over the rod until getting interference. With a twisting motion, slide the loaded head down over the rod.
12. Loosely torque head end SHCS to allow head to rotate slightly.
13. Before final torque, place cylinder on level surface to square head and cap. Torque SHCS in a crisscross pattern. Use the following chart for torque tolerances.
14. Stroke cylinder by hand. This will enable detection of any binding. If binding does occur, repeat steps 11-14.

Seal Installation Guide

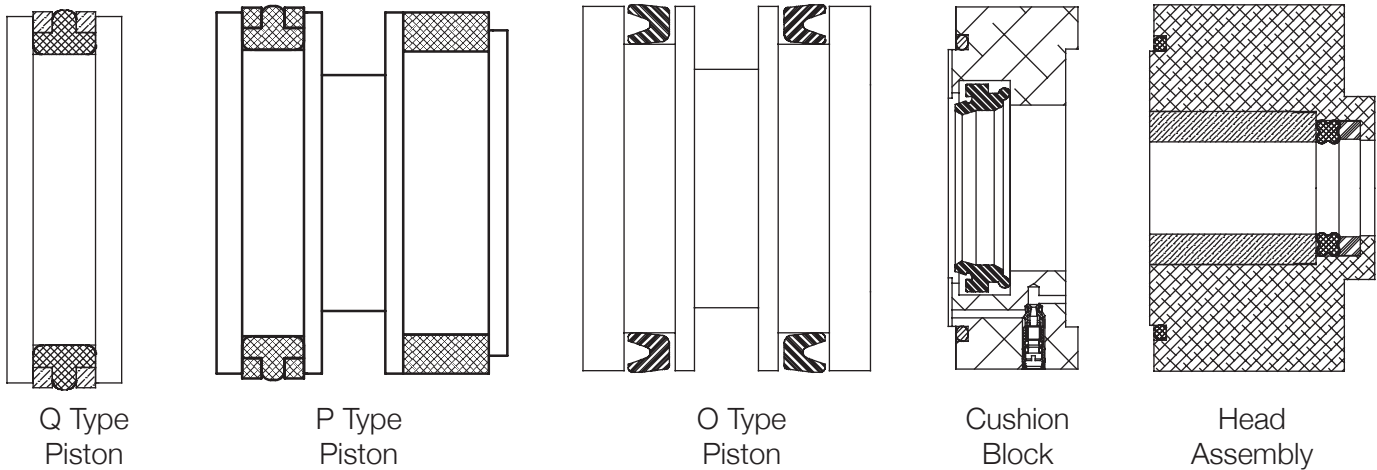

**Screw Torque Tolerances
(lbs-ft) Part #16**

Bore	Min.	Max.
3/4	1	1.5
1	1	2
1 1/8	1	2


**Sinker Tube Part
Numbers**

Bore	Part #
3/4	C06-C91
1	R06-E91
1 1/8	C06-G91

Note: Sinker Tubes are not included in kits. They can be ordered using the part numbers from the provided chart.


Diagrams

Pneumatic Service Temperatures:
 Nitrile Seals: -10°F (-23°C) to 165°F (74°C)
 FKM Seals: 0°F (-17°C) to 400°F (204°C)

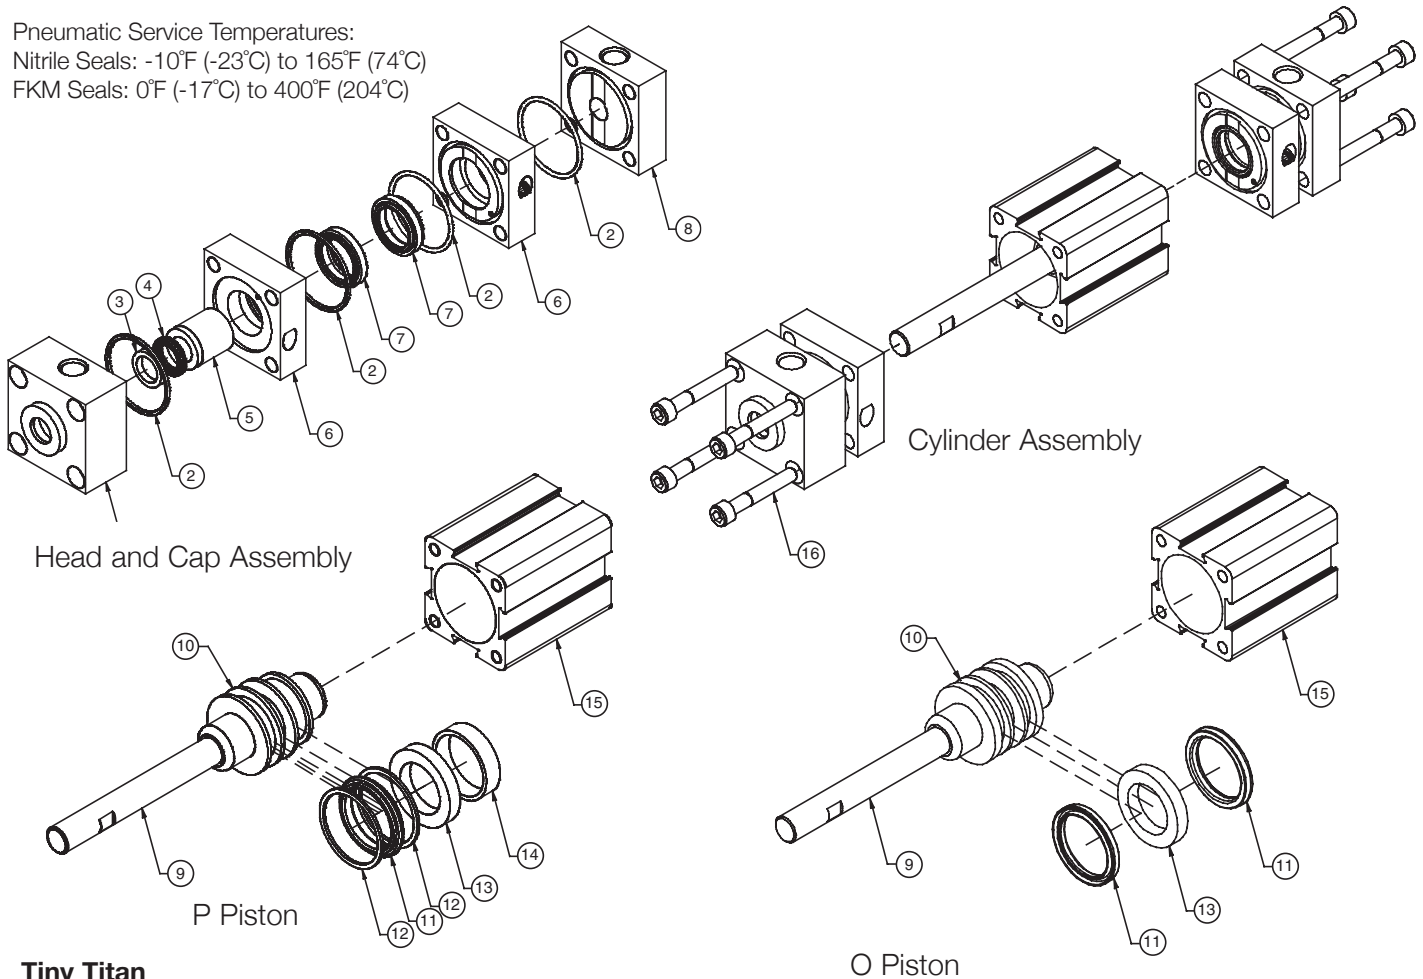

Tiny Titan

Part #	Description	Parts included in:		
		Seal Kit	Repair Kit	Piston/Rod Assembly
1	Head		X	
2	Tube End Seals	X	X	
3	Rod Wiper	X	X	
4	Rod Seal	X	X	
5	Bushing		X	
6	Cushion Block			
7	Cushion Seal	X	X	
8	Cap			
9	Rod			X
10	Piston			X
11	Piston Seal	X	X	
12	Back-up Rings	X	X	
13	Magnet			X
14	Wearband	X	X	
15	Tube			
16	Socket Head Cap Screws (SHCS)			

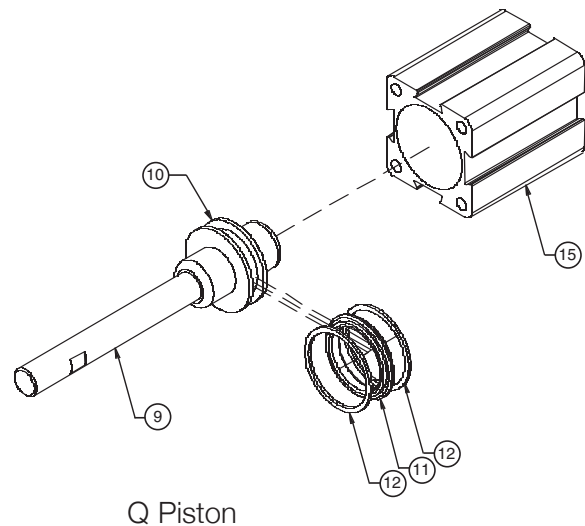


Information subject to change without notice. For ordering information or regarding your local sales office visit www.numatics.com.

Repair Kit Removal/Installation Instructions

1. Loosen 8 Socket Head Cap Screws (SHCS) (Part #16) to remove Head (Part #1), Cap (Part #8), Piston/Rod Assembly (Part #9 & #10), and Cushion Block(s) (Part #6) if cylinder is cushioned.
2. Carefully remove old seals and wearband (Part #2, #7*, #11, #14). Depending on the cylinder type, piston seal(s) and wearband will vary. Any damage to the seal grooves may result in leakage.
3. Lubricate new seals and Wearband (Part #14) with supplied Numatics' Lube. Examine seals before installing for any contamination. Contamination may cause leakage.
4. Install Piston Seal(s) (Part #11). Depending on the cylinder type, piston seal(s) will vary. Make sure the piston seal is not twisted inside groove. If cylinder type is P or Q, install back-up rings (Part #12). See Seal Installation Guide.
5. Install lubricated wearbands onto piston/rod assembly if cylinder type is P. Sink piston assembly into sinker tube. See Sinker Tube Part Numbers Chart.
6. Apply lube inside the cylinder tube.
7. Sink piston/rod assembly into cylinder tube.
8. Press piston/rod assembly flush with the cylinder tube. Wipe off any lube from the face of the piston.
9. Place Tube End Seals (Part #2) into head and cap seal grooves. Examine seals after installing for any contamination. Contamination may cause leakage.
10. Lightly grease Rod Seal (Part #4) in the supplied loaded head before reassembling the cylinder. This will ease the installation of the head over the rod.
11. Reassemble cylinder except for the loaded head. Loosely torque cap end SHCS to allow cap to rotate slightly. Carefully place loaded head over the rod until getting interference. With a twisting motion, slide the loaded head down over the rod.
12. Loosely torque head end SHCS to allow head to rotate slightly.
13. Before final torque, place cylinder on level surface to square head and cap. Torque SHCS in a crisscross pattern. Use the following chart for torque tolerances.
14. Stroke cylinder by hand. This will enable detection of any binding. If binding does occur, repeat steps 11-14.

Seal Installation Guide

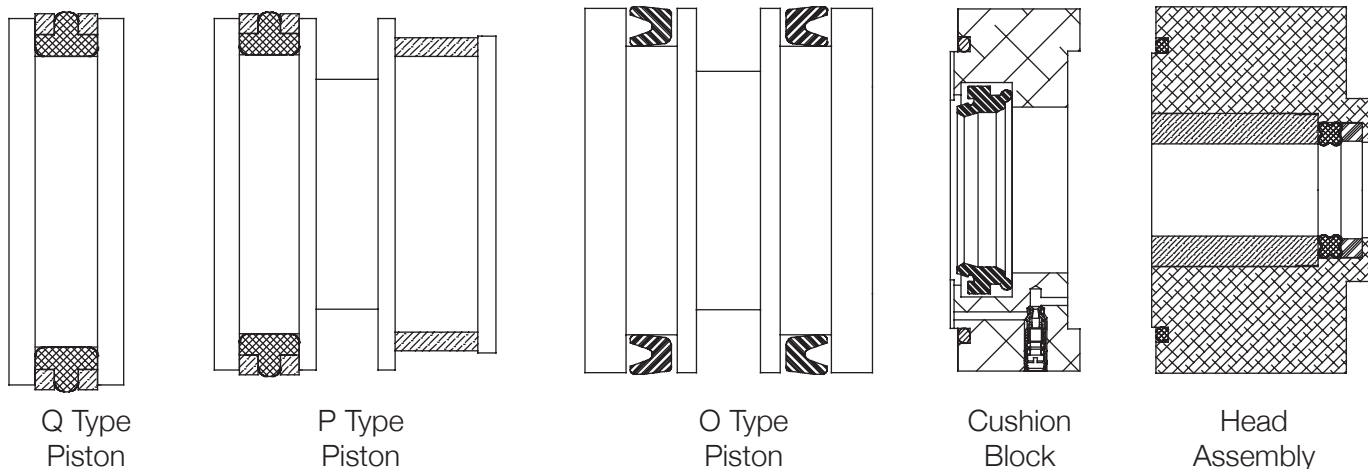

**Screw Torque Tolerances
(lbs-ft) Part #16**

Bore	Min.	Max.
3/4	1	1.5
1	1	2
1 1/8	1	2

**Sinker Tube Part
Numbers**


Bore	Part #
3/4	C06-C91
1	R06-E91
1 1/8	C06-G91

Note: Sinker Tubes are not included in kits. They can be ordered using the part numbers from the provided chart.

Seal Kit Removal/Installation Instructions

1. Loosen 8 Socket Head Cap Screws (SHCS) (Part #16) to remove Head (Part #1), Cap (Part #8), Piston/Rod Assembly (Part #9 & #10), and Cushion Block(s) (Part #6) if cylinder is cushioned.
2. Carefully remove old seals and wearband (Part #2, #3, #4, #7, #11, #14). Depending on the cylinder type, piston seal(s) and wearband will vary. Any damage to the seal grooves may result in leakage.
3. Lubricate new seals and Wearband (Part #14) with supplied Numatics' Lube. Examine seals before installing for any contamination. Contamination may cause leakage.
4. Install Piston Seal(s) (Part #11). Depending on the cylinder type, piston seal(s) will vary. Make sure the piston seal is not twisted inside groove. If cylinder type is P or Q, install back-up rings (Part #12). See Seal Installation Guide.
5. Install lubricated wearbands onto piston/rod assembly if cylinder type is P. Sink piston assembly into sinker tube. See Sinker Tube Part Numbers Chart.
6. Apply lube inside the cylinder tube.
7. Sink piston/rod assembly into cylinder tube.
8. Press piston/rod assembly flush with the cylinder tube. Wipe off any lube from the face of the piston.
9. Place Tube End Seals (Part #2) into head and cap seal grooves. Examine seals after installing for any contamination. Contamination may cause leakage.
10. Install Rod Wiper (Part #3) and Rod Seal (Part #4) into Head (Part #1). See Seal Installation Guide. Lightly grease rod seal after installation. This will ease the installation of the head over the rod.
11. Reassemble cylinder except for the head. Loosely torque cap end SHCS to allow cap to rotate slightly. Carefully place head over the rod until getting interference. With a twisting motion, slide the head down over the rod.
12. Loosely torque head end SHCS to allow head to rotate slightly.
13. Before final torque, place cylinder on level surface to square head and cap. Torque SHCS in a crisscross pattern. Use the following chart for torque tolerances.
14. Stroke cylinder by hand. This will enable detection of any binding. If binding does occur, repeat steps 11-14.

Seal Installation Guide

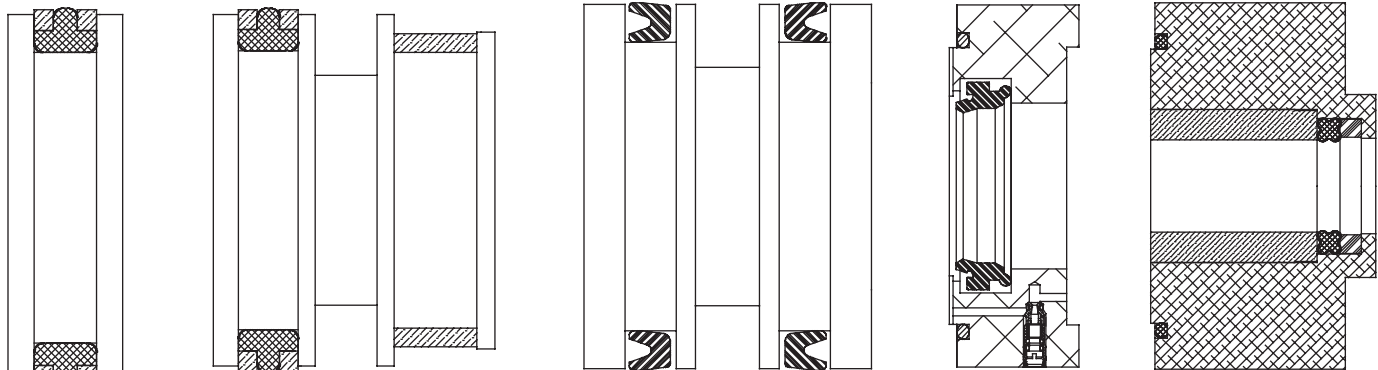

Q Type Piston

P Type Piston

O Type Piston

Cushion Block

Head Assembly

Screw Torque Tolerances (lbs-ft) Part #16

Bore	Min.	Max.
3/4	1	1.5
1	1	2
1 1/8	1	2

Sinker Tube Part Numbers

Bore	Part #
3/4	C06-C91
1	R06-E91
1 1/8	C06-G91

Note: Sinker Tubes are not included in kits. They can be ordered using the part numbers from the provided chart.



World Class Supplier of Pneumatic Components



World Headquarters

USA Numatics, Incorporated

46280 Dylan Drive
Novi, Michigan 48377

P: 248-596-3200
F: 248-596-3201

Canada Numatics, Ltd

P: 519-758-2700
F: 519-758-5540

México - Ascomatica SA de CV

P: 52 55 58 09 56 40 (DF y Area metropolitana)
P: 01 800 000 ASCO (2726) (Interior de la República)
F: 52 55 58 09 56 60

Brazil Ascoval Ind.e Comercio Ltda

P: (55) 11-4208-1700
F: (55) 11-4195-3970

LT-TinyTitanCatalog Rev 10/12
10M-IPC-01/15

© Numatics Inc. 2009 - 2013

Numatics® is registered in the United States and elsewhere

Numatics, Inc. | Tel (248) 596-3200 | www.numatics.com | email: insidesales@numatics.com



青岛秉诚自动化设备有限公司
地址：中国·青岛市重庆南路99号海尔云街甲3号楼7F

服务热线：4006-918-365
网址：http://www.ivalve.cc

传真：(86-532)585-10-365
Email：sales@bechinas.com

