

NUMATICS®

FE Series

Feed Escapement



www.numatics.com


EMERSON
Industrial Automation

BCAE
Automation Solutions

青岛秉诚自动化设备有限公司
地址：中国·青岛市重庆南路99号海尔云街甲3号楼7F

服务热线：4006-918-365
网址：<http://www.ivalve.cc>

传真：(86-532)585-10-365
Email：sales@bechinas.com

FE Series

Features and Benefits	2
How To Order	2
Dimensions and Technical Specifications	2-3
Switch Information	6-7

The FE-Series design uses two double acting cylinders that are cross-ported and internally sequenced for smooth functioning parts regulation. Internal back pressure cross-port design allows both rods to be retracted with the air off to easily clear jammed parts. A four way two position valve is required for operation.

A. Body

High strength hardcoat aluminum.

B. Rods

Ground aluminum, hardcoat anodized, PTFE impregnated non-rotating.

C. Retract Stop Adjustments


Two adjustment screws allow flexibility to adjust the retract stroke on both rods independently.

D. Bronze Bushings

High side load capabilities, self lubricating, long life.

E. Sensing

Hall effect sensors available to sense extend and retract positions.

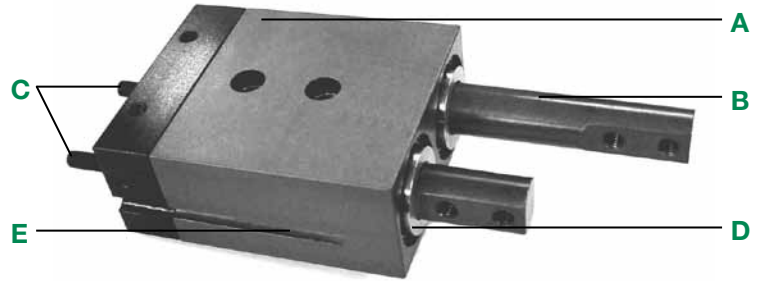

How to Order

FE 12 1 A 1 1 X

Bore Size
12 = 1.25

Sensing Type
Standard Cord Set
1 = Hall Switch- PNP (sourcing)
2 = Hall Switch- NPN (sinking)
6 = No Sensing
Quick Disconnect Cord Set
Z = Hall Switch- PNP (sourcing) Straight
Y = Hall Switch- NPN (sinking) Straight

Special Options
X = No Options


Sensing Position
1 = Single Position Left Side
2 = Single Position Right Side
5 = Two Position Left and Right Side
6 = No Sensing

Sensing Position
A = Extend
B = Retract
C = Extend and Retract
D = No Sensing

When ordering additional switches:

Switch Description	Part No.	Quick Disconnect Part No.
Hall Effect PNP (Sourcing)	CS-20TP	CS-18P-QD
Hall Effect NPN (Sinking)	CS-20TN	CS-20TN-QD

FE Series Dimensions

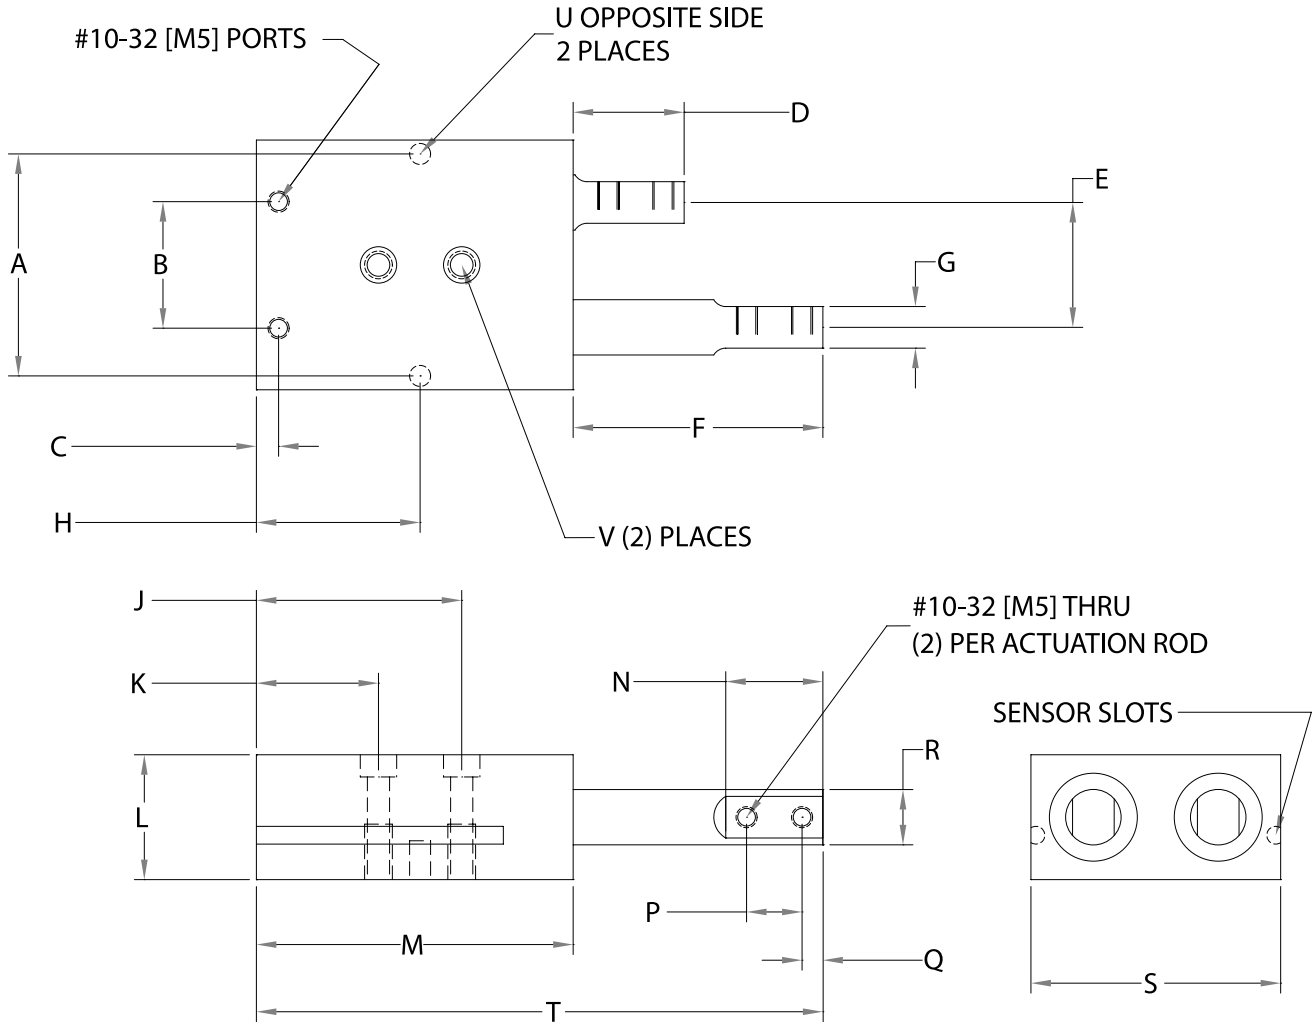

Dimensions: Inches


	FE11	FE12	FE13
A	1.6875	2.0000	2.5000
B	0.936	1.140	1.374
C	0.156	0.200	0.200
D	0.875	1.000	1.000
E	0.937	1.125	1.375
F	1.875	2.250	2.562
G	0.250	0.375	0.373
H	1.063	1.475	1.500
J	1.313	1.850	1.875
K	0.813	1.100	1.125
L	1.000	1.125	1.375
M	2.313	2.854	3.062
N	0.750	0.875	0.875
P	0.375	0.500	0.500
Q	0.188	0.188	0.188
R	0.375	0.500	0.562
S	1.875	2.250	2.750
T	4.188	5.104	5.625
U	1/8" S.F. .250 DEEP [3MM S.F. X 6MM DEEP]	3/16" S.F. .250 DEEP [5MM S.F. X 6MM DEEP]	3/16" S.F. .250 DEEP [5MM S.F. X 6MM DEEP]
V	C'B For #8-32 [M4] SHCS Tapped #10-32 [M5] Opp. Side	C'B For #10-32 [M5] SHCS Tapped # 1/4-20 [M6] Opp. Side	C'B For # 1/4-20 [M6] SHCS Tapped # 5/16-18 [M8] Opp. Side

Specifications

	FE11	FE12	FE13
Stroke	1.0 in	1.25 in	1.56 in
Force Extend @ 100 psi	22.5 lbs.	43.7 lbs.	75 lbs.
Force retract @ 100 psi	12.5 lbs.	41.2 lbs.	65 lbs.
Time	.35 Sec	.35 Sec	.35 Sec
Pressure Range	20-120 psi	20-120 psi	20-120 psi
Side Play	+/- .002 in	+/- .002 in	+/- .002 in
Weight	8 oz	12 oz	1 lb


Load Capacity (Dynamic)

	FE11	FE12	FE13
Mx	5 in-lbs	13 in-lbs	24 in-lbs
My	5 in-lbs	13 in-lbs	24 in-lbs
Mz	5 in-lbs	13 in-lbs	24 in-lbs

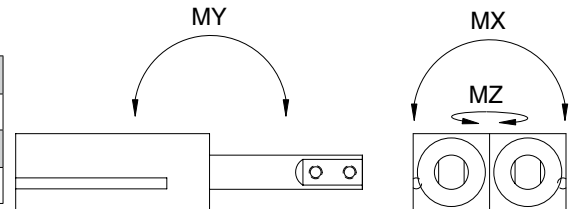


FE Series Switch Information

	Switch or Bracket Description	Standard Part No.	Quick Disconnect Part No.
1	Hall Effect PNP (Sourcing) 4mm	CS-20TP	CS-20TP-QD
1	Hall Effect NPN (Sinking) 4mm	CS-20TN	CS-20TN-QD
1	Reed Switch 4mm	CS-20TR	CS-20TR-QD




**Reed Switch (AC/DC NO)
8 mm Connector - CS-20TR-QD**




Sensor Type	Reed Switch
Switching Logic	SPST Normally Open
Output	-
Operating Voltage	5-120V DC/AC 50/60 Hz
Switching Current	50mA max. (Resistive)
Power Rating*	6 Watts
Voltage Drop	2.5V
Current Consumption	-
Leakage Current	-
LED Indicator	Red
Operating Frequency	200 Hz
Temperature Range	-
Shock / Vibration	30G/9G
Protection Circuit	None
Set Screw Max. Torque	-

**Reed Switch (AC/DC NO)
Flying Lead - CS-20TR**

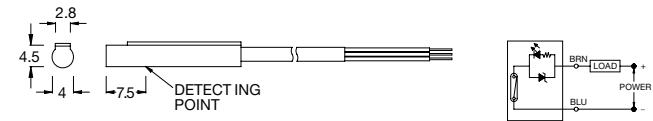


Sensor Type	Reed Switch
Switching Logic	SPST Normally Open
Output	-
Operating Voltage	5-120V DC/AC 50/60 Hz
Switching Current	50mA max. (Resistive)
Power Rating*	6 Watts
Voltage Drop	2.5 max.
Current Consumption	-
Leakage Current	-
LED Indicator	Red
Operating Frequency	200 Hz
Temperature Range	-
Shock / Vibration	30G/9G
Protection Circuit	None
Set Screw Max. Torque	-

**Electro Switch (PNP NO)
8 mm Connector - CS-20TP-QD**




Sensor Type	Solid State Output
Switching Logic	Normally Open
Output	PNP Current Sourcing
Operating Voltage	5-30 VDC
Switching Current	50mA max.
Power Rating*	1.5 Watts
Voltage Drop	1.5 V @ 25 mA max.
Current Consumption	15 mA @ 24 VDC max.
Leakage Current	0.01 mA max.
LED Indicator	Green
Cable	-
Operating Frequency	1000 Hz
Magnetic Requirement	40 Gauss parallel
Temperature Range	14 to 158°F (-10 to 70°C)
Shock / Vibration	50G/9G
Enclosure Classification	IEC 529 IP67 (NEMA 6)
Protection Circuit	Reverse Polarity, Surge Suppression
Set Screw Max. Torque	1.77 in-lbs (0.2 N-m)

**Electro Switch (NPN NO)
8 mm Connector - CS-20TN-QD**




Sensor Type	Solid State Output
Switching Logic	Normally Open
Output	NPN Current Sinking
Operating Voltage	5-30 VDC
Switching Current	50mA max.
Power Rating*	1.5 Watts
Voltage Drop	0.5 V @ 25 mA max.
Current Consumption	12 mA @ 24 VDC max.
Leakage Current	0.01 mA max.
LED Indicator	Red
Cable	-
Operating Frequency	1000 Hz
Magnetic Requirement	40 Gauss parallel
Temperature Range	14 to 158°F (-10 to 70°C)
Shock / Vibration	50G/9G
Enclosure Classification	IEC 529 IP67 (NEMA 6)
Protection Circuit	Reverse Polarity, Surge Suppression
Set Screw Max. Torque	1.77 in-lbs (0.2 N-m)

Electro Switch (NPN NO) Flying Lead - CS-20TN

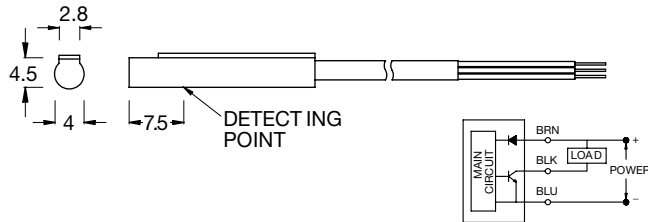

Sensor Type	Solid State Output
Switching Logic	Normally Open
Output	NPN Current Sinking
Operating Voltage	5-30 VDC
Switching Current	50mA max.
Power Rating*	1.5 Watts
Voltage Drop	0.5 V @ 25 mA max.
Current Consumption	12 mA @ 24 VDC max.
Leakage Current	0.01 mA max.
LED Indicator	Red
Cable	-
Operating Frequency	1000 Hz
Magnetic Requirement	40 Gauss parallel
Temperature Range	14 to 158°F (-10 to 70°C)
Shock / Vibration	50G/9G
Enclosure Classification	IEC 529 IP67 (NEMA 6)
Protection Circuit	Reverse Polarity, Surge Suppression
Set Screw Max. Torque	1.77 in-lbs (0.2 N-m)


Electro Switch (PNP NO) Flying Lead - CS-20TP

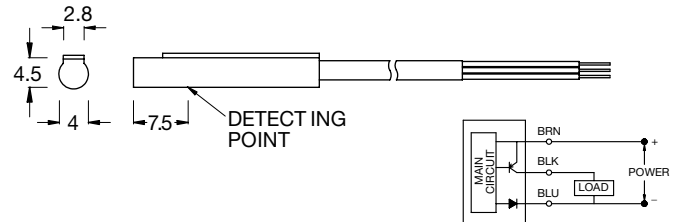

Sensor Type	Solid State Output
Switching Logic	Normally Open
Output	PNP Current Sourcing
Operating Voltage	5-30 VDC
Switching Current	50mA max.
Power Rating*	1.5 Watts
Voltage Drop	1.5 V @ 25 mA max.
Current Consumption	12 mA @ 24 VDC max.
Leakage Current	0.01 mA max.
LED Indicator	Green
Cable	Abrasion resistant polyurethane (PUR) jacket, PVC insulation
Operating Frequency	1000 Hz
Magnetic Requirement	40 Gauss parallel
Temperature Range	14 to 158°F (-10 to 70°C)
Shock / Vibration	50G/9G
Enclosure Classification	IEC 529 IP67 (NEMA 6)
Protection Circuit	Reverse Polarity, Surge Suppression
Set Screw Max. Torque	1.77 in-lbs (0.2 N-m)

Female Connectors for Reed Switches and Hall Effect Sensors

Type	Order Code
Straight, 5 m Cable	PXCST
Elbow, 5 m Cable	PXC90

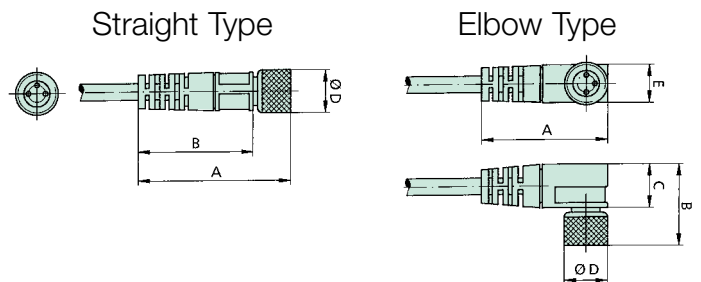

NUMATICS®

World Class Supplier of Pneumatic Components



World Headquarters

USA Numatics, Incorporated

46280 Dylan Drive
Novi, Michigan 48377

P: 248-596-3200
F: 248-596-3201

Canada Numatics, Ltd

P: 519-758-2700
F: 519-758-5540

México - Ascomatica SA de CV

P: 52 55 58 09 56 40 (DF y Area metropolitana)
P: 01 800 000 ASCO (2726) (Interior de la República)
F: 52 55 58 09 56 60

Brazil Ascoval Ind.e Comercio Ltda

P: (55) 11-4208-1700
F: (55) 11-4195-3970